

Precision 7960 Tower

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.


 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents


| | |
|--|-----------|
| Chapter 1: Set up your Precision 7960 Tower | 4 |
| Chapter 2: Views of Precision 7960 Tower | 9 |
| Display..... | 9 |
| Back..... | 10 |
| System-board call outs..... | 11 |
| Chapter 3: Specifications of Precision 7960 Tower | 14 |
| Dimensions and weight..... | 14 |
| Processor..... | 14 |
| Chipset..... | 15 |
| Operating system..... | 15 |
| Memory..... | 15 |
| Memory matrix..... | 16 |
| External ports..... | 18 |
| Internal slots..... | 18 |
| Ethernet..... | 19 |
| Wireless module..... | 19 |
| Audio..... | 19 |
| Storage..... | 20 |
| Storage matrix..... | 21 |
| RAID (Redundant Array of Independent Disks)..... | 22 |
| Media-card reader..... | 23 |
| Power ratings..... | 23 |
| Power cord..... | 24 |
| Power supply connector..... | 26 |
| GPU—Discrete..... | 26 |
| Video port resolution..... | 27 |
| Hardware security..... | 28 |
| Environmental..... | 28 |
| Regulatory compliance..... | 28 |
| Operating and storage environment..... | 29 |
| Chapter 4: Getting help and contacting Dell | 30 |

Set up your Precision 7960 Tower

1. Connect the keyboard and mouse.

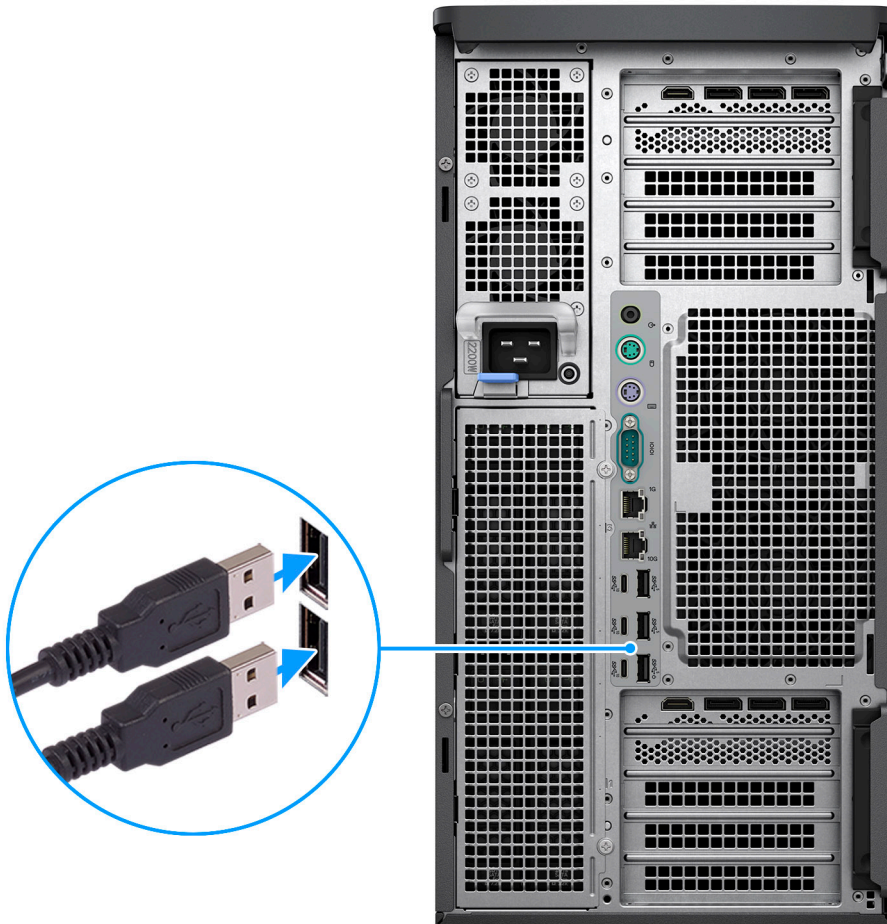

2. Connect to your network using a cable, or connect to a wireless network.

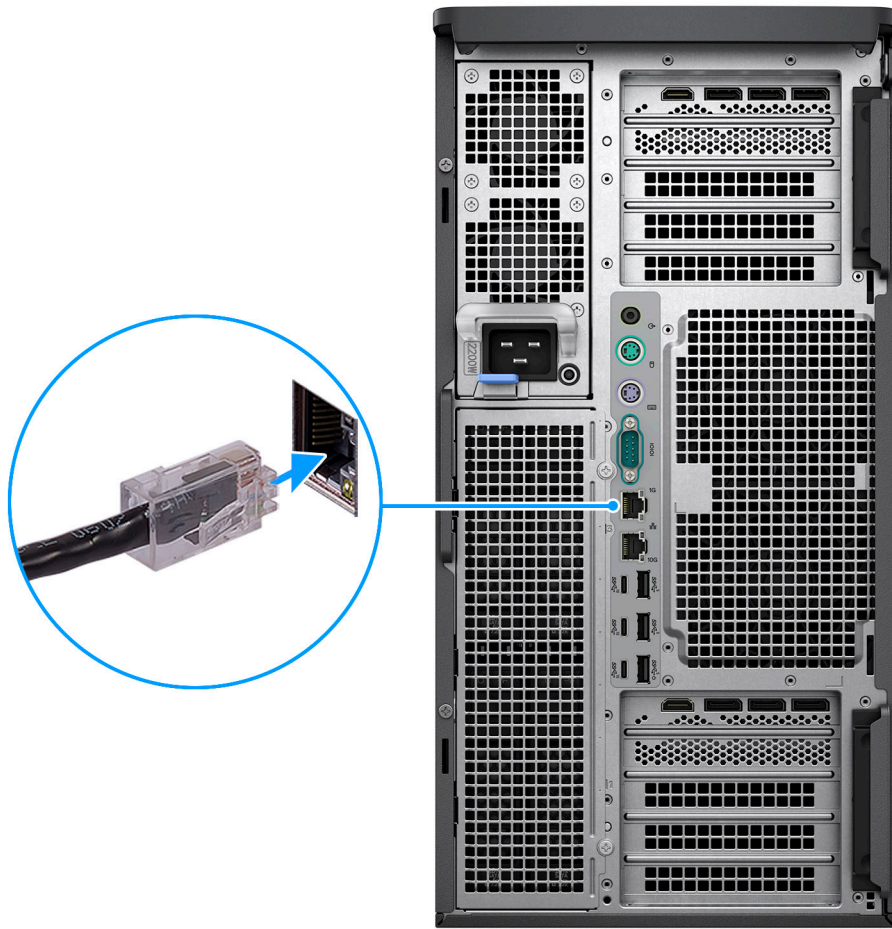


3. Connect the display.



4. Connect the power cable.

CAUTION: Connect the power cable to a Power Distribution Unit (PDU) 16 A and then connect the PDU to the wall outlet.

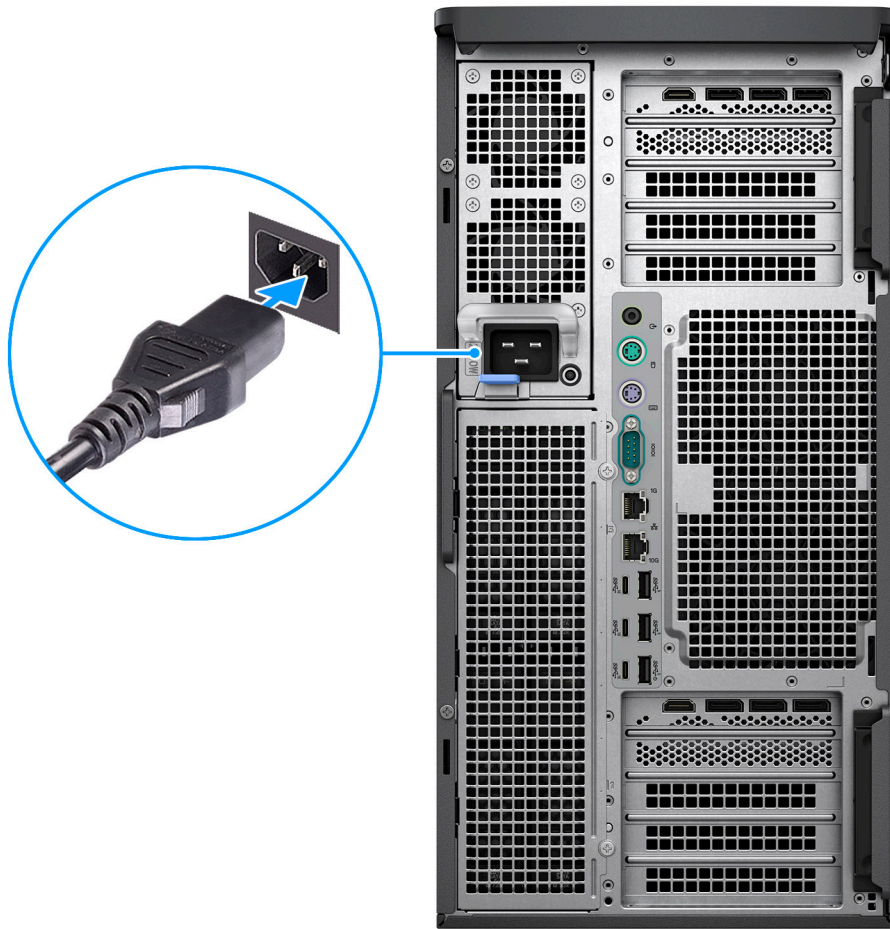

5. Press the power button.



6. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
 - **NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

7. Locate and use Dell apps from the Windows Start menu—Recommended

Table 1. Locate Dell apps






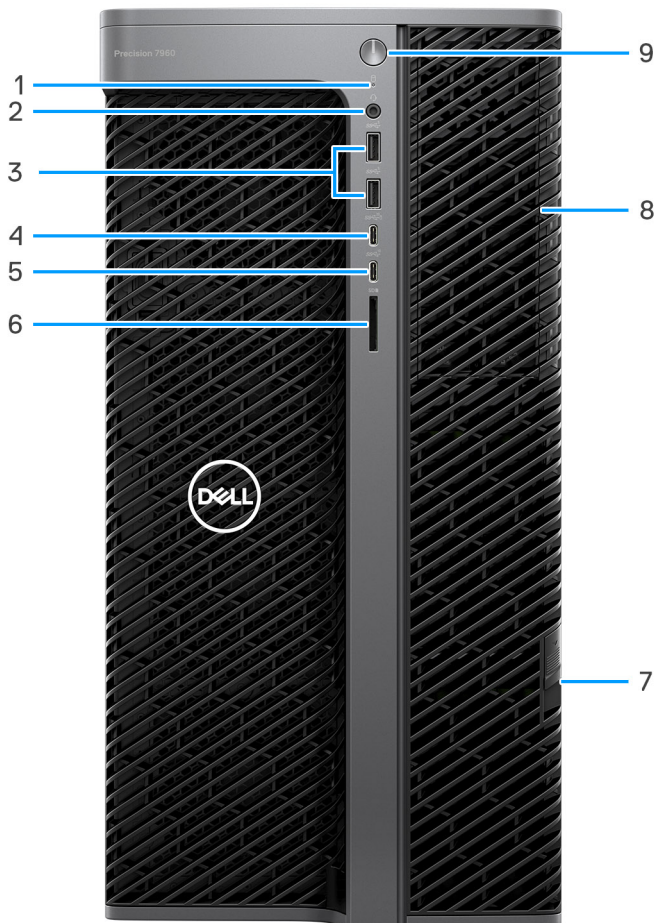
| Resources | Description |
|---|--|
|  | <p>My Dell</p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p> |

Table 1. Locate Dell apps (continued)

| Resources | Description |
|---|---|
|  | <p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at www.dell.com/serviceabilitytools. Click SupportAssist and then, click SupportAssist for Home PCs.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p> |
|  | <p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information on using Dell Update, search in the Knowledge Base Resource at www.dell.com/support.</p> |
|  | <p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not preinstalled on your computer. For more information on using Dell Digital Delivery, search in the Knowledge Base Resource at www.dell.com/support.</p> |


Views of Precision 7960 Tower

Display



1. Hard-drive activity indicator
2. Universal audio port
3. USB 3.2 Gen 1 ports
4. USB 3.2 Gen 2x2 Type-C port with PowerShare
5. USB 3.2 Gen 2 Type-C port
6. SD-card slot
7. SATA/SAS/NVMe drive flexbays
8. Optical drive slots
9. Power button

Back

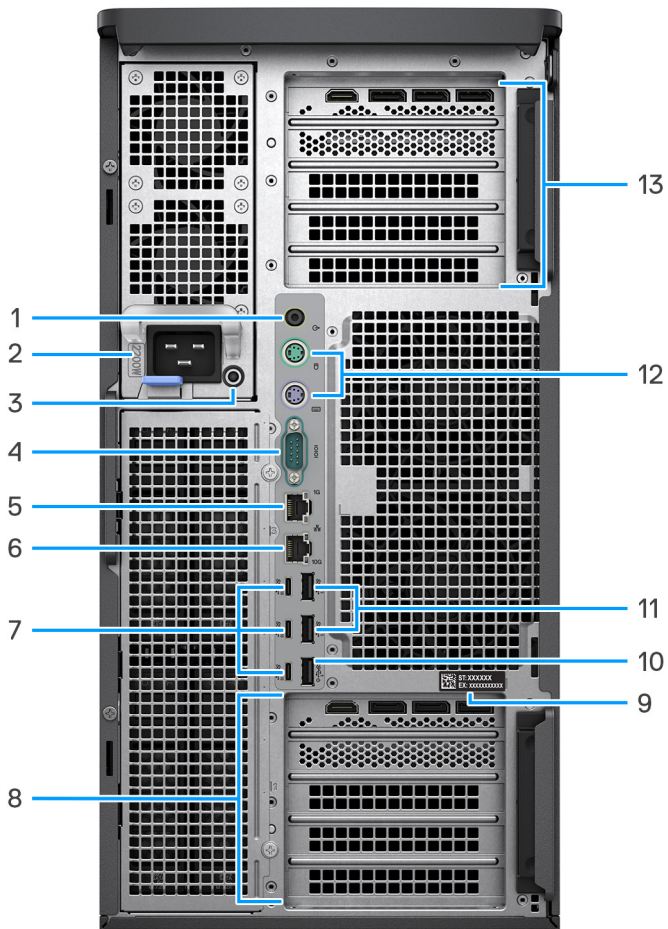

1. Line-out port
2. Power adapter port
3. PSU BIST button
4. Serial port
5. RJ45 Ethernet port, 1 GbE
6. RJ45 Ethernet port, 10 GbE
7. USB 3.2 Gen 2 Type-C ports
8. Expansion card slots
9. Service tag
10. USB 3.2 Gen 1 port with Smart Power On
11. USB 3.2 Gen 1 ports
12. PS2 ports (for keyboard and mouse)
13. Expansion card slots

System-board call outs

This topics provides detailed call outs for the connectors on the system board:

System-board call outs (front side)

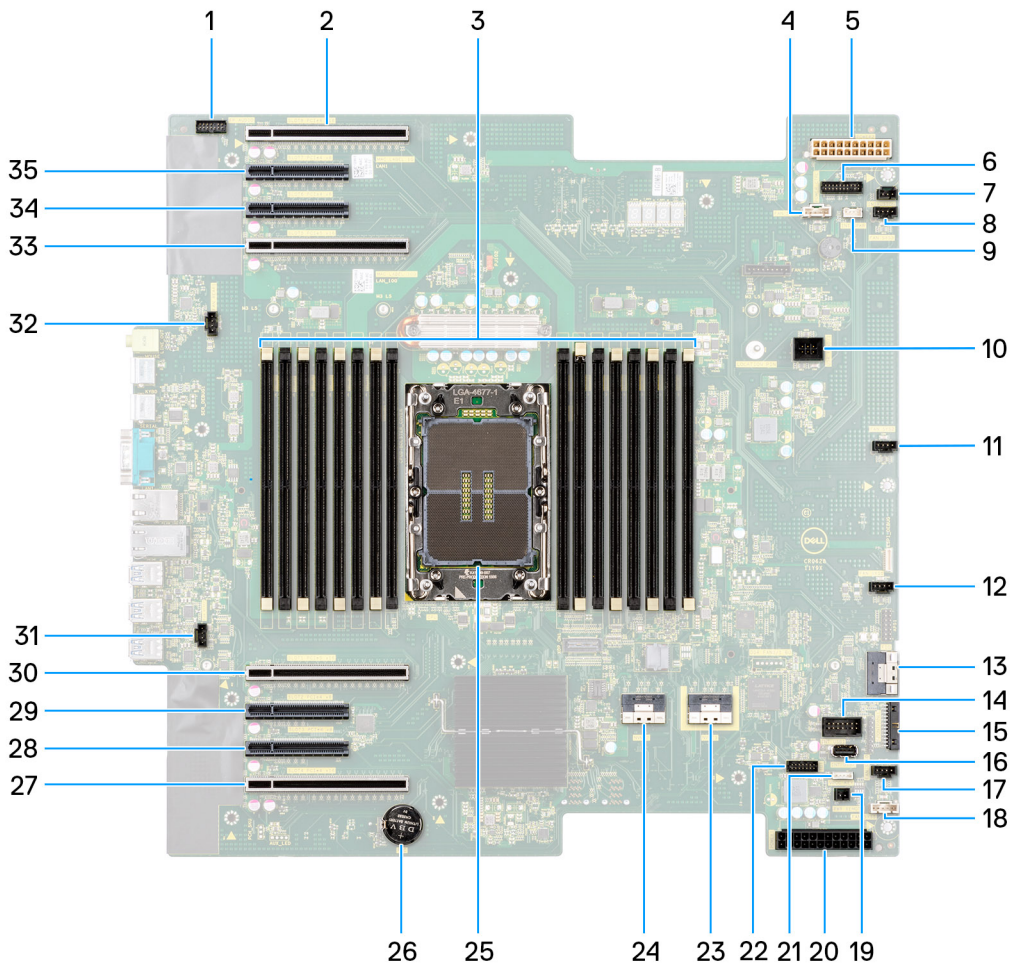


Table 2. Precision 7960 tower system board callouts (front side)

| No | Connector | Description |
|----|------------------------|-----------------------------------|
| 1 | FP AUDIO | Front panel audio-cable connector |
| 2 | SLOT8 | PCI Express Gen 4 x16 slot |
| 3 | DIMMx16 (DIMM1—DIMM16) | Memory module connectors |
| 4 | FAN SYS4 | System fan connector |
| 5 | POWER2 | Power cable connector |
| 6 | POWER CRTL | Power controller switch connector |
| 7 | INTRUSION | Intrusion switch connector |
| 8 | FAN SYS3 | System fan connector |
| 9 | INT SPKR | Internal-speaker connector |
| 10 | DDR FAN 0/1 | Memory-module fan connector |

Table 2. Precision 7960 tower system board callouts (front side) (continued)

| No | Connector | Description |
|-----------|------------------|---|
| 11 | FAN SYS2 | System fan connector |
| 12 | FAN SYS1 | System fan connector |
| 13 | FIO | Front I/O-daughter board connector |
| 14 | INT USB1 | Internal USB 2.0 |
| 15 | FRONTPANEL | Front I/O-power connector |
| 16 | INT USB2 | Internal USB 2.0 |
| 17 | FAN SYS0 | System fan connector |
| 18 | FAN SYS5 | System fan connector |
| 19 | PWR REMOTE | System fan connector |
| 20 | POWER1 | Intel Virtual RAID on CPU |
| 21 | VROC Key | VROC key connector |
| 22 | TBT | Thunderbolt add-in card connector |
| 23 | REAR NVME2-3 | Rear NVMe connector for externally facing M.2 flexbay drive |
| 24 | REAR NVME0-1 | Rear NVMe connector for externally facing M.2 flexbay drive |
| 25 | CPU | Processor socket |
| 26 | RTC | Coin-cell battery |
| 27 | SLOT4 | PCI Express Gen 4 x16 slot |
| 28 | SLOT3 | PCI Express Gen 4 x8 slot wired as x4 electrically |
| 29 | SLOT2 | PCI Express Gen 4 x8 slot wired as x4 electrically |
| 30 | SLOT1 | PCI Express Gen 5 x16 slot |
| 31 | FAN REAR0 | Rear Fan 0 |
| 32 | FAN REAR1 | Rear Fan 1 |
| 33 | SLOT5 | PCI Express Gen 5 x16 slot |
| 34 | SLOT6 | PCI Express Gen 4 x8 slot |
| 35 | SLOT7 | PCI Express Gen 4 x8 slot |

System-board call outs (rear side)

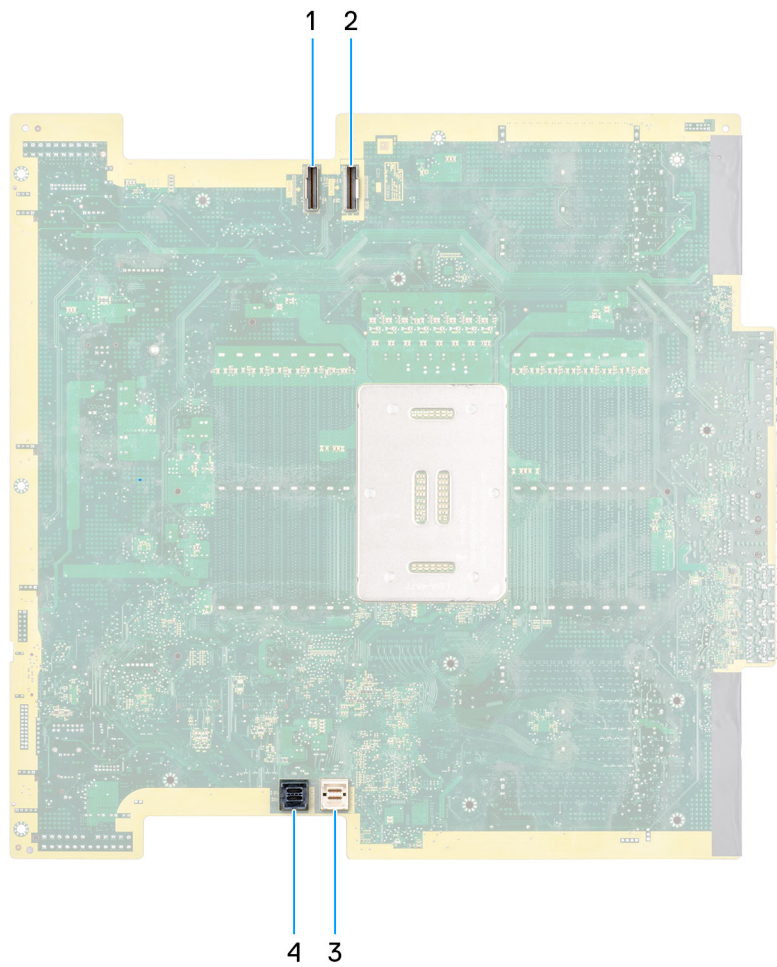


Table 3. Precision 7960 tower system board callouts (rear side)


| No | Connector | Description |
|----|-----------------------------|--|
| 1 | Front NVME0-1 (rear access) | Front NVMe connector for externally facing M.2 flexbay drive |
| 2 | Front NVME2-3 (rear access) | Front NVMe connector for externally facing M.2 flexbay drive |
| 3 | SATA 4-7 (rear access) | SATA hard drive data-cable connector |
| 4 | SATA 0-3 (rear access) | SATA hard drive data-cable connector |

Specifications of Precision 7960 Tower

Dimensions and weight

The following table lists the height, width, depth, and weight of your Precision 7960 Tower.

Table 4. Dimensions and weight

| Description | Values |
|--|---|
| Height | 430.70 mm (16.96 in.) / 434.20 mm (17.09 in.) with rubber feet |
| Width | 218.00 mm (8.58 in.) |
| Depth | 538.30 mm (21.19 in.) / 569.15 mm (22.41 in.) with lock structure |
| Weight  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability. | <ul style="list-style-type: none"> 37.56 kg (82.82 lbs.) — maximum 23.81 kg (52.50 lbs.)— typical 21.04 kg (46.39 lbs.)— minimum |

Processor

The following table lists the details of the processors that are supported by your Precision 7960 Tower .

Table 5. Processor

| Description | Option one | Option two | Option three | Option four | Option five | Option six | Option seven | Option eight | Option nine |
|------------------------|----------------------|----------------------|---------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Processor type | Intel Xeon W5-3423 | Intel Xeon W5-3425 | Intel Xeon W5-3433 | Intel Xeon W5-3435 X | Intel Xeon W7-3445 | Intel Xeon W7-3455 | Intel Xeon W7-3465X | Intel Xeon W9-3475X | Intel Xeon W9-3495X |
| Processor wattage | 220 W | 270 W | 220 W | 270 W | 270 W | 270 W | 300 W | 300 W | 350 W |
| Processor core count | 12 | 12 | 16 | 16 | 20 | 24 | 28 | 36 | 56 |
| Processor thread count | 24 | 24 | 32 | 32 | 40 | 48 | 56 | 72 | 112 |
| Processor speed | 2.10 GHz to 4.20 GHz | 3.20 GHz to 4.60 GHz | 2.0 GHz to 4.20 GHz | 3.10 GHz to 4.70 GHz | 2.60 GHz to 4.80 GHz | 2.50 GHz to 4.80 GHz | 2.50 GHz to 4.80 GHz | 2.20 GHz to 4.80 GHz | 1.90 GHz to 4.80 GHz |
| Processor cache | 30 MB | 30 MB | 45 MB | 45 MB | 52.5 MB | 67.5 MB | 75 MB | 82.5 MB | 105 MB |
| Integrated graphics | Not supported | Not supported | Not supported | Not supported | Not supported | Not supported | Not supported | Not supported | Not supported |

Chipset

The following table lists the details of the chipset supported by your Precision 7960 Tower.

Table 6. Chipset

| Description | Values |
|--|--|
| Chipset | Intel W790 |
| Processor | Intel Xeon W5/W7/W9 processors |
| DRAM bus width | <ul style="list-style-type: none">64-bit (for single-channel)128-bit (for dual-channel) |
| Flash EPROM | <ul style="list-style-type: none">16 MB (nRPMC)32 MB (RPMC) |
| PCIe bus | Up to Gen5 |
| Non-volatile memory | Yes |
| BIOS configuration Serial Peripheral Interface (SPI) | 256 Mbit (32 MB) located at SPI_FLASH |
| Trusted Platform Module (TPM) 2.0 (Discrete TPM Enabled) | 24 KB located at TPM 2.0 on chipset |
| Firmware-TPM (Discrete TPM disabled) | By default the Platform Trust Technology feature is visible to the operating system. |
| NIC EEPROM | LOM configuration contained within SPI flash ROM instead of LOM e-fuse |

Operating system

Your Precision 7960 Tower supports the following operating systems:

- Windows 11 Pro for Workstations
- Windows 11 Pro for Workstations Downgrade (Windows 10 Pro for Workstations Image-factory installed)
- Windows 10 CMIT Government Edition, 64-bit (China only)
- Ubuntu 22.04 LTS, 64-bit
- Red Hat Enterprise Linux 8.6

Memory

The following table lists the memory specifications of your Precision 7960 Tower.

Table 7. Memory specifications

| Description | Values |
|------------------------------|-----------|
| Memory slots | 16 DIMMS |
| Memory type | DDR5 |
| Memory speed | 4800 MT/s |
| Maximum memory configuration | 4 TB |
| Minimum memory configuration | 16 GB |

Table 7. Memory specifications (continued)

| Description | Values |
|---------------------------------|--|
| Memory size per slot | 16 GB, 32 GB, 64 GB, 128 GB, 256 GB |
| Memory configurations supported | <ul style="list-style-type: none"> ● 16 GB, 1 x 16 GB, DDR5 RDIMM, 4800 MT/s ● 32 GB, 1 x 32 GB, DDR5 RDIMM, 4800 MT/s ● 32 GB, 2 x 16 GB, DDR5 RDIMM, 4800 MT/s ● 64 GB, 1 x 64 GB, DDR5 RDIMM, 4800 MT/s ● 64 GB, 2 x 32 GB, DDR5 RDIMM, 4800 MT/s ● 64 GB, 4 x 16 GB, DDR5 RDIMM, 4800 MT/s ● 96 GB, 6 x 16 GB, DDR5 RDIMM, 4800 MT/s ● 128 GB, 2 x 64 GB, DDR5 RDIMM, 4800 MT/s ● 128 GB, 4 x 32 GB, DDR5 RDIMM, 4800 MT/s ● 128 GB, 8 x 16 GB, DDR5 RDIMM, 4800 MT/s ● 192 GB, 6 x 32 GB, DDR5 RDIMM, 4800 MT/s ● 192 GB, 12 x 16 GB, DDR5 RDIMM, 4800 MT/s ● 256 GB, 4 x 64 GB, DDR5 RDIMM, 4800 MT/s ● 256 GB, 16 x 16 GB, DDR5 RDIMM, 4800 MT/s ● 384 GB, 6 x 64 GB, DDR5 RDIMM, 4800 MT/s ● 384 GB, 12 x 32 GB, DDR5 RDIMM, 4800 MT/s ● 512 GB, 2 x 256 GB, DDR5 RDIMM, 4800 MT/s ● 512 GB, 4 x 128 GB, DDR5 RDIMM, 4800 MT/s ● 512 GB, 8 x 64 GB, DDR5 RDIMM, 4800 MT/s ● 512 GB, 16 x 32 GB, DDR5 RDIMM, 4800 MT/s ● 768 GB, 6 x 128 GB, DDR5 RDIMM, 4800 MT/s ● 768 GB, 12 x 64 GB, DDR5 RDIMM, 4800 MT/s ● 1 TB, 4 x 256 GB, DDR5 RDIMM, 4800 MT/s ● 1 TB, 8 x 128 GB, DDR5 RDIMM, 4800 MT/s ● 1 TB, 16 x 64 GB, DDR5 RDIMM, 4800 MT/s ● 1.5 TB, 6 x 256 GB, DDR5 RDIMM, 4800 MT/s ● 1.5 TB, 12 x 128 GB, DDR5 RDIMM, 4800 MT/s ● 2 TB, 8 x 256 GB, DDR5 RDIMM, 4800 MT/s ● 2 TB, 16 x 128 GB, DDR5 RDIMM, 4800 MT/s ● 3 TB, 12 x 256 GB, DDR5 RDIMM, 4800 MT/s ● 4 TB, 16 x 256 GB, DDR5 RDIMM, 4800 MT/s |

NOTE: When 12th or 16th memory DIMM slots are populated in your computer, the 4800 MT/s memory speed will clock down to 4400 MT/s.

Memory matrix

The following table lists the memory configurations supported on your Precision 7960 Tower.

NOTE: Ensure that you install the memory module starting from DIMM 1 slot.

Table 8. Memory matrix

| Configurations | DIM M 8 | DIM M 16 | DIM M 2 | DIM M 10 | DIM M 6 | DIM M 14 | DIM M 4 | DIM M 12 | DIM M 9 | DIM M 1 | DIM M 15 | DIM M 7 | DIM M 11 | DIM M 3 | DIM M 13 | DIM M 5 |
|----------------|---------|----------|---------|----------|---------|----------|---------|----------|---------|---------|----------|---------|----------|---------|----------|---------|
| 16 GB DDR5 | - | - | - | - | - | - | - | - | - | 16 | - | - | - | - | - | - |
| 32 GB DDR5 | - | - | - | - | - | - | - | - | - | 32 | - | - | - | - | - | - |

Table 8. Memory matrix (continued)

| Configurations | DIM M 8 | DIM M 16 | DIM M 2 | DIM M 10 | DIM M 6 | DIM M 14 | DIM M 4 | DIM M 12 | DIM M 9 | DIM M 1 | DIM M 15 | DIM M 7 | DIM M 11 | DIM M 3 | DIM M 13 | DIM M 5 |
|----------------|---------|----------|---------|----------|---------|----------|---------|----------|---------|---------|----------|---------|----------|---------|----------|---------|
| 32 GB DDR5 | - | - | 16 | - | - | - | - | - | - | 16 | - | - | - | - | - | - |
| 64 GB DDR5 | - | - | - | - | - | - | - | - | - | 64 | - | - | - | - | - | - |
| 64 GB DDR5 | - | - | 32 | - | - | - | - | - | - | 32 | - | - | - | - | - | - |
| 64 GB DDR5 | - | - | 16 | - | - | - | 16 | - | - | 16 | - | - | - | 16 | - | - |
| 96 GB DDR5 | - | - | 16 | - | 16 | - | 16 | - | - | 16 | - | - | - | 16 | - | 16 |
| 128 GB DDR5 | 16 | - | 16 | - | 16 | - | 16 | - | - | 16 | - | 16 | - | 16 | - | 16 |
| 128 GB DDR5 | - | - | 32 | - | - | - | 32 | - | - | 32 | - | - | - | 32 | - | - |
| 128 GB DDR5 | - | - | 64 | - | - | - | - | - | - | 64 | - | - | - | - | - | - |
| 192 GB DDR5 | 16 | - | 16 | 16 | 16 | - | 16 | 16 | 16 | 16 | - | 16 | 16 | 16 | - | 16 |
| 192 GB DDR5 | - | - | 32 | - | 32 | - | 32 | - | - | 32 | - | - | - | 32 | - | 32 |
| 256 GB DDR5 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 | 16 |
| 256 GB DDR5 | - | - | 64 | - | - | - | 64 | - | - | 64 | - | - | - | 64 | - | - |
| 384 GB DDR5 | 32 | - | 32 | 32 | 32 | - | 32 | 32 | 32 | 32 | - | 32 | 32 | 32 | - | 32 |
| 384 GB DDR5 | - | - | 64 | - | 64 | - | 64 | - | - | 64 | - | - | - | 64 | - | 64 |
| 512 GB DDR5 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 512 GB DDR5 | 64 | - | 64 | - | 64 | - | 64 | - | - | 64 | - | 64 | - | 64 | - | 64 |
| 768 GB DDR5 | 64 | - | 64 | 64 | 64 | - | 64 | 64 | 64 | 64 | - | 64 | 64 | 64 | - | 64 |
| 1 TB DDR5 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 | 64 |
| 1 TB DDR5 | 128 | - | 128 | - | 128 | - | 128 | - | - | 128 | - | 128 | - | 128 | - | 128 |
| 1 TB DDR5 | - | - | 256 | - | - | - | 256 | - | - | 256 | - | - | - | 256 | - | - |
| 1.5 TB DDR5 | 128 | - | 128 | 128 | 128 | - | 128 | 128 | 128 | 128 | - | 128 | 128 | 128 | - | 128 |
| 1.5 TB DDR5 | - | - | 256 | - | 256 | - | 256 | - | - | 256 | - | - | - | 256 | - | 256 |
| 2 TB DDR5 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 | 128 |
| 2 TB DDR5 | 256 | - | 256 | - | 256 | - | 256 | - | - | 256 | - | 256 | - | 256 | - | 256 |
| 3 TB DDR5 | 256 | - | 256 | 256 | 256 | - | 256 | 256 | 256 | 256 | - | 256 | 256 | 256 | - | 256 |

Table 8. Memory matrix (continued)

| Configurations | DIM M 8 | DIM M 16 | DIM M 2 | DIM M 10 | DIM M 6 | DIM M 14 | DIM M 4 | DIM M 12 | DIM M 9 | DIM M 1 | DIM M 15 | DIM M 7 | DIM M 11 | DIM M 3 | DIM M 13 | DIM M 5 |
|----------------|---------|----------|---------|----------|---------|----------|---------|----------|---------|---------|----------|---------|----------|---------|----------|---------|
| 4 TB DDR5 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 | 256 |

External ports

The following table lists the external ports of your Precision 7960 Tower.

Table 9. External ports

| Description | Values |
|---------------------|--|
| Network port | <ul style="list-style-type: none"> One RJ45 Ethernet port, 1 GbE One RJ45 Ethernet port, 10 GbE |
| USB ports | <p>Front:</p> <ul style="list-style-type: none"> Two USB 3.2 Gen 1 ports One USB 3.2 Gen 2x2 Type-C port with PowerShare One USB 3.2 Gen 2 Type-C port <p>Rear:</p> <ul style="list-style-type: none"> Three USB 3.2 Gen 2 Type-C ports Two USB 3.2 Gen 1 ports One USB 3.2 Gen 1 port with Smart Power On |
| Audio port | <ul style="list-style-type: none"> One universal audio jack One Line-out port |
| Video port | Not supported |
| Media-card reader | Not supported |
| Power-adaptor port | Not supported |
| Security-cable slot | <ul style="list-style-type: none"> One kensington security-cable slot One padlock ring |

Internal slots

The following table lists the internal slots of your Precision 7960 Tower.

Table 10. Internal slots

| Description | Values |
|---------------|--|
| Expansion | <ul style="list-style-type: none"> Two full-height Gen5 PCIe x16 slots Two full-height Gen4 PCIe x16 slots Two full-height Gen4 PCIe x8 slots Two full-height, half-length Gen4 PCIe x8 slots wired as x4 electrically |
| mSATA | NA |
| SATA/SAS/NVMe | <ul style="list-style-type: none"> Eight externally facing (four front and four rear) storage flexbays with optical drive configuration Ten externally facing (six front and four rear) storage flexbays without optical drive configuration Up to 8 M.2 NVMe drives (four front and four rear) |

Table 10. Internal slots (continued)

| Description | Values |
|-------------|--------|
| M.2 | NA |

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Precision 7960 Tower.


Table 11. Ethernet specifications

| Description | Option 1 | Option 2 |
|---------------|------------------|------------------------|
| Model number | Intel i219-LM | Marvell AQC113 |
| Transfer rate | 10/100/1000 Mbps | 10/100/1000/10000 Mbps |

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module that is supported on your Precision 7960 Tower.

Table 12. Wireless module specifications

| Description | Values |
|---------------------------|--|
| Model number | Qualcomm WCN6856-DBS |
| Transfer rate | Up to 3571 Mbps |
| Frequency bands supported | 2.4 GHz/5 GHz/6 GHz |
| Wireless standards | <ul style="list-style-type: none">• WiFi 802.11a/b/g• Wi-Fi 4 (WiFi 802.11n)• Wi-Fi 5 (WiFi 802.11ac)• Wi-Fi 6E (WiFi 802.11ax) |
| Encryption | <ul style="list-style-type: none">• 64-bit/128-bit WEP• AES-CCMP• TKIP |
| Bluetooth wireless card | Bluetooth 5.3 |
| |  NOTE: The version of the Bluetooth wireless card may vary depending on the operating system that is installed on your computer. |

Audio

The following table lists the audio specifications of your Precision 7960 Tower.

Table 13. Audio specifications

| Description | Values |
|-------------------|---|
| Audio controller | Realtek ALC3246-CGT |
| Stereo conversion | Supported (Front panel single universal audio jack) |

Table 13. Audio specifications (continued)

| Description | | Values |
|----------------------------|------------------------|---------------------------------|
| Internal audio interface | | High definition audio interface |
| External audio interface | | Line-out (re-taskable) |
| Number of speakers | | One |
| Internal-speaker amplifier | | Supported |
| External volume controls | | No hardware volume buttons |
| Speaker output: | | |
| | Average speaker output | 2 W |
| | Peak speaker output | 2.5 W |
| Subwoofer output | | Not applicable |
| Microphone | | Not applicable |

Storage

This section lists the storage options on your Precision 7960 Tower.

Table 14. Storage specifications

| Storage type | Interface type | Capacity |
|--|-------------------|--------------|
| 2.5-inch, 7200 RPM, HDD | SATA 3.0 | 500 GB |
| 3.5-inch, 7200 RPM, HDD | SATA 3.0 | 1 TB |
| M.2 2280, Class 40 SSD | PCIe NVMe Gen4 x4 | Up to 4 TB |
| M.2 2280, Class 40 SSD, Self Encrypting Opal 2.0 | PCIe NVMe Gen4 x4 | 512 GB/1 TB |
| 2.5-inch, 10000 RPM, SAS, Enterprise HDD | SATA 3.0 | Up to 2.4 TB |
| 2.5-inch, 15000 RPM, SAS, Enterprise HDD | SATA 3.0 | 600 GB |
| 3.5-inch, 7200 RPM, SATA, Enterprise HDD | SATA 3.0 | Up to 12 TB |
| 2.5-inch, MU, SATA, SSD | SATA | 1.92 TB |

Storage matrix

The following table lists the storage configurations supported on your Precision 7960 Tower.

Table 15. Storage matrix—1

| Storage description | Flex 0 | | Flex 1 | | Flex 2 | | Flex 3 | | Flex 4 | | Zoom |
|---|--------------|--------------|--------------|--------------|--------|--------------------|--------------|--------------|--------------|--------------|------|
| | HDD0 | HDD1 | HDD2 | HDD3 | HDD4 | HDD5 | Rear HDD0 | Rear HDD1 | Rear HDD2 | Rear HDD3 | |
| Flex PCIe Non-RAID Boot (Intel) | PCIe | PCIe | PCIe | PCIe | | ODD/NA | PCIe | PCIe | PCIe | PCIe | N |
| Flex PCIe Non-RAID Boot (Intel) + SATA (Intel) - 4 pcs PCIe | PCIe | PCIe | PCIe | PCIe | | ODD/NA SATA | SATA/ SAS | SATA/ SAS | SATA/ SAS | SATA/ SAS | N |
| Flex PCIe Non-RAID Boot (Intel) + SATA (Intel) - 2 pcs PCIe | SATA | SATA | PCIe | PCIe | | NA | SATA/ SAS | SATA/ SAS | SATA/ SAS | SATA/ SAS | N |
| Flex PCIe Non-RAID Boot (Intel) | PCIe | PCIe | PCIe | PCIe | | ODD/NA | NA | | | | N |
| Flex PCIe RAID Boot (Intel) | PCIe | PCIe | PCIe | PCIe | | ODD/NA | NA | | | | N |
| Zoom Boot JBOD + SATA (Intel) | SATA | SATA | SATA | SATA | | ODD/NA | SATA | SATA | SATA | SATA | Y |
| Zoom Boot JBOD + SATA/SAS (MegaRAID) | SATA/ SAS | SATA/ SAS | SATA/ SAS | SATA/ SAS | | ODD/NA SATA/SAS | SATA/ SAS | SATA/ SAS | SATA/ SAS | SATA/ SAS | Y |

Table 16. Storage matrix—2

| Zoom | SSD location | | | |
|----------------|--------------|------|------|------|
| Description | SSD0 | SSD1 | SSD2 | SSD3 |
| Zoom2 Non-RAID | Yes | No | No | No |
| Zoom2 Non-RAID | Yes | Yes | No | No |
| Zoom4 Non-RAID | Yes | No | No | No |
| Zoom4 Non-RAID | Yes | Yes | No | No |
| Zoom4 Non-RAID | Yes | Yes | Yes | No |
| Zoom4 Non-RAID | Yes | Yes | Yes | Yes |

Table 17. Storage matrix—3

| Zoom Boot | SSD location | | | |
|-------------|--------------|------|------|------|
| Description | SSD0 | SSD1 | SSD2 | SSD3 |

Table 17. Storage matrix—3 (continued)

| Zoom Boot | SSD location | | | |
|---------------------|---------------------|-----|-----|-----|
| Zoom2 Non-RAID Boot | Yes (Boot) | No | No | No |
| Zoom2 Non-RAID Boot | Yes (Boot) | Yes | No | No |
| Zoom4 Non-RAID Boot | Yes (Boot) | No | No | No |
| Zoom4 Non-RAID Boot | Yes (Boot) | Yes | No | No |
| Zoom4 Non-RAID Boot | Yes (Boot) | Yes | Yes | No |
| Zoom4 Non-RAID Boot | Yes (Boot) | Yes | Yes | Yes |

RAID (Redundant Array of Independent Disks)

For optimal performance when configuring drives as a RAID volume, Dell recommends drive models that are identical.

 **NOTE:** RAID is not supported on Intel Optane configurations.

RAID 0 (Striped, Performance) volumes benefit from higher performance when drives are matched because the data is split across multiple drives: any IO operations with block sizes larger than the stripe size will split the IO and become constrained by the slowest of the drives. For RAID 0 IO operations where block sizes are smaller than the stripe size, whichever drive the IO operation targets will determine the performance, which increases variability and results in inconsistent latencies. This variability is particularly pronounced for write operations and it can be problematic for applications that are latency sensitive. One such example of this is any application that performs thousands of random writes per second in very small block sizes.

RAID 1 (Mirrored, Data Protection) volumes benefit from higher performance when drives are matched because the data is mirrored across multiple drives: all IO operations must be performed identically to both drives, thus variations in drive performance when the models are different, results in the IO operations completing only as fast as the slowest drive. While this does not suffer the variable latency issue in small random IO operations as with RAID 0 across heterogeneous drives, the impact is nonetheless large because the higher performing drive becomes limited in all IO types. One of the worst examples of constrained performance here is when using unbuffered IO. To ensure writes are fully committed to non-volatile regions of the RAID volume, unbuffered IO bypasses cache (for example by using the Force Unit Access bit in the NVMe protocol) and the IO operation will not complete until all the drives in the RAID volume have completed the request to commit the data. This kind of IO operation completely negates any advantage of a higher performing drive in the volume.

RAID 5 provides better performance by using data striping and protection through parity. The disadvantage of RAID 5 is that rebuilding a large RAID 5 volume requires a longer period of time. The following are the key features of RAID 5:

- Requires at least three drives.
- Data is available even if one of the drives present in the volume fails. The failed drive must be replaced, and the volume must be rebuilt for the data to be accessible.
- The total capacity is N-1, where N is the total capacity of the drives in the array. For example, if you use three 1 TB drives in a RAID 5 array, the total volume size is 2 TB.

RAID 10 is a stripe of mirrors that combines the features of RAID 0 and RAID 1. As the blocks are striped and mirrored, the performance and redundancy are higher. The disadvantage of RAID 10 is that it is more expensive than other RAID levels, with a higher number of drives required. The following are the key features of RAID 10:

- Requires a minimum of four drives. Only an even number of drives can be used, and an odd number of drives are not possible.
- The total volume capacity is half the sum of individual drives capacity. For example, when you use four drives of 1 TB, you get a RAID 10 volume of 2 TB.

Care must be taken to match not only the drive vendor, capacity, and class, but also the specific model. Drives from the same vendor, with the same capacity, and even within the same class, can have very different performance characteristics for certain types of IO operations. Thus, matching by model ensures that the RAID volumes is comprised of an homogeneous array of drives that will deliver all the benefits of a RAID volume without incurring the additional penalties when one or more drives in the volume are lower performing.

Precision 7960 Tower supports RAID with more than one hard drive configuration.

Media-card reader

The following table lists the media cards that are supported on your Precision 7960 Tower.

Table 18. Media-card reader specifications

| Description | Values |
|--|---|
| Media-card type | One SD card slot |
| Media-cards supported | <ul style="list-style-type: none"> Secure Digital (SD) Secure Digital High Capacity (SDHC) Secure Digital Extended Capacity (SDXC) |
| <p>NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card that is installed on your computer.</p> | |

Power ratings

The following table lists the power rating specifications of Precision 7960 Tower.

Table 19. Power ratings

| Description | Option one | Option two |
|-----------------------------|---|---|
| Type | 1100 W/1400 W Gold internal power supply unit | 1500 W/2200 W Platinum internal power supply unit |
| PSU dimension | | |
| Height | 63 mm (2.48 in.) | 63 mm (2.48 in.) |
| Width | 160 mm (6.29 in.) | 160 mm (6.29 in.) |
| Depth | 225 mm (8.85 in.) | 225 mm (8.85 in.) |
| Input voltage | 90 Vac - 264 Vac | 90 Vac - 264 Vac |
| Input frequency | 47 Hz - 63 Hz | 47 Hz - 63 Hz |
| Input current (maximum) | 15 A | 16 A |
| Output current (continuous) | 90 Vac~180 Vac (1100 W) <ul style="list-style-type: none"> 12 VDC/91.6 A -12 VDC/0.5 A 12 VSBDC/8 A 180.1 Vac~264 Vac (1400 W) <ul style="list-style-type: none"> 12 V/116.7 A -12 VDC/0.5 A 12 VSBDC/8 A | 90 Vac~114.9 Vac (1200 W) <ul style="list-style-type: none"> 12 VDC/98.37 A -12 VDC/0.5 A 12 VSBDC/8 A 115 Vac~179.9 Vac (1500 W) <ul style="list-style-type: none"> 12 V/122.96 A -12 VDC/0.5 A 12 VSBDC/8 A 180 Vac~264 Vac (2200 W) <ul style="list-style-type: none"> 12 VDC/180.33 A -12 VDC/0.5 A 12 VSBDC/8 A |
| Rated output voltage | <ul style="list-style-type: none"> 12 VDC -12 VDC 12 VSBDC | <ul style="list-style-type: none"> 12 VDC -12 VDC 12 VSBDC |

Table 19. Power ratings (continued)

| Description | | Option one | Option two |
|-------------------|--|--|--|
| Temperature range | | | |
| Operating | | 5°C to 50°C (41°F to 122°F) Standby—40°C (104°F) | 5°C to 50°C (41°F to 122°F) Standby—40°C (104°F) |
| Storage Minimum | | -40°C to 70°C (-40°F to 158°F) | -40°C to 70°C (-40°F to 158°F) |

Power cord

This section lists the power-cord plug types for 1500 W/2200 W PSU on your Precision 7960 Tower that is based on the countries shipped.

i **NOTE:** The 1500 W/2200 W PSUs have C20 cords and require a 20 A circuit at 115 V or a 220 V circuit. The power supply units are externally accessible, removal, and lockable.

Table 20. Power-cord plug types





| Power-cord style | Plug type | Affected countries |
|------------------|---|---|
| Argentina |  <p>Figure 1. Argentina</p> | Argentina |
| Australia |  <p>Figure 2. Australia</p> | <ul style="list-style-type: none"> • Australia • Christmas Island • Cook Islands • Fiji • Kiribati • Nauru • New Zealand • Papua New Guinea • Pitcairn • Tonga • Tuvalu • Uruguay |
| Brazil |  <p>Figure 3. Brazil</p> | Brazil |
| China |  <p>Figure 4. China</p> | China |

Table 20. Power-cord plug types (continued)







| Power-cord style | Plug type | Affected countries |
|---------------------|--|--|
| Italy |  <p>Figure 5. Italy</p> | <ul style="list-style-type: none"> ● Chile ● Holy See ● Italy ● Uruguay |
| Japan—250 V |  <p>Figure 6. Japan—250 V</p> | Japan |
| North America—125 V |  <p>Figure 7. North America—125 V</p> | <ul style="list-style-type: none"> ● Anguilla ● American Samoa ● Aruba ● Bahamas ● Barbados ● Belize ● Bermuda |
| North America—250 V |  <p>Figure 8. North America—250 V</p> | <ul style="list-style-type: none"> ● British Virgin Islands ● Canada ● Cayman Islands ● Colombia ● Costa Rica ● Dominican Republic ● Ecuador ● El Salvador ● Guam ● Guatemala ● Haiti ● Honduras ● Jamaica ● North Mariana ● Marshall Island ● Mexico ● Nicaragua ● Palau ● Panama ● Philippines ● Puerto Rico ● Samoa ● St. Maarten ● Trinidad and Tobago ● Turks and Caicos ● United States ● US Virgin Islands ● Venezuela ● Vietnam |

Table 20. Power-cord plug types (continued)

| Power-cord style | Plug type | Affected countries |
|------------------|---|--|
| Switzerland |  <p>Figure 9. Switzerland</p> | <ul style="list-style-type: none"> • Liechtenstein • Switzerland |
| India |  <p>Figure 10. India</p> | India |

Power supply connector

The following table lists the Power supply connector specifications of your Precision 7960 Tower.

Table 21. Power supply connector

| Power supply unit | Connector design |
|---|------------------------------------|
| 1100 W/1400 W Gold internal power supply unit | Golden finger design without cable |
| 1500 W/2200 W Platinum internal power supply unit | Golden finger design without cable |

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Precision 7960 Tower.

Table 22. GPU—Discrete

| Controller | Memory size | Memory type |
|--------------------------------|-------------|-------------|
| NVIDIA RTX A6000 | 48 GB | GDDR6 |
| NVIDIA RTX A5500 | 24 GB | GDDR6 |
| NVIDIA RTX A4500 | 20 GB | GDDR6 |
| NVIDIA RTX A4000 | 16 GB | GDDR6 |
| NVIDIA RTX A2000 | 12 GB | GDDR6 |
| NVIDIA T1000 | 8 GB | GDDR6 |
| NVIDIA T400 | 4 GB | GDDR6 |
| AMD Radeon PRO W6800 | 16 GB | GDDR6 |
| AMD Radeon PRO W6600 | 8 GB | GDDR6 |
| NVIDIA RTX 6000 Ada Generation | 48 GB | GDDR6 |
| AMD Radeon PRO W6400 | 4 GB | GDDR6 |
| AMD Radeon PRO W6300 | 2 GB | GDDR6 |

Table 22. GPU—Discrete (continued)

| Controller | Memory size | Memory type |
|----------------------|-------------|-------------|
| NVIDIA RTX 5000 | 32 GB | GDDR6 |
| AMD Radeon PRO W7500 | 8 GB | GDDR6 |
| AMD Radeon PRO W7600 | 8 GB | GDDR6 |

Video port resolution

The following table lists the video port resolution for your Precision 7960 Tower.

Table 23. Video port resolution

| Graphics card | Video ports | Maximum supported resolution |
|--------------------------------|-------------------------|--|
| NVIDIA RTX A6000 | Four DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| NVIDIA RTX A5500 | Four DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| NVIDIA RTX A4500 | Four DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| NVIDIA RTX A4000 | Four DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| NVIDIA RTX A2000 | Four mini-DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| NVIDIA T1000 | Four mini-DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| NVIDIA T400 | Three mini-DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| AMD Radeon PRO W6800 | Six mini-DP 1.4 ports | 7680 x 4320 @60 Hz |
| AMD Radeon PRO W6600 | Four DP 1.4 ports | 7680 x 4320 @60 Hz |
| NVIDIA RTX 6000 Ada Generation | Four DP 1.4 ports | 7680 x 4320 @60 Hz |
| AMD Radeon PRO W6400 | Four DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| AMD Radeon PRO W6300 | Four DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| NVIDIA RTX 5000 Ada Generation | Four DP 1.4 ports | 7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC |
| AMD Radeon PRO W7500 | Four DP 1.4 ports | 7680 x 4320 @60 Hz |
| AMD Radeon PRO W7600 | Four DP 1.4 ports | 7680 x 4320 @60 Hz |

Hardware security

The following table lists the hardware security of your Precision 7960 Tower.

Table 24. Hardware security

| Hardware security |
|--|
| Kensington security-cable slot |
| Padlock loop |
| Chassis lock support - Coin locker |
| Chassis intrusion switch |
| Optional lockable bezels for externally-facing front and rear storage flexbays |
| TPM 2.0 Discrete Hardware |

Environmental

The following table lists the environmental specifications of your Precision 7960 Tower.

Table 25. Environmental

| Feature | Values |
|--|----------|
| Recyclable packaging | Yes |
| EPEAT 2018 Gold for selected configuration | Yes |
| BFR/PVC—free | No |
| Vertical orientation packaging support | Yes |
| Multi-Pack packaging | No |
| Energy-Efficient Power Supply | Standard |
| ENV0424 compliant | Yes |

NOTE: Wood-based fiber packaging contains a minimum of 35% recycled content by total weight of wood-based fiber. Packaging that contains without wood-based fiber can be claimed as Not Applicable. The anticipated required criteria for EPEAT 2018.

Regulatory compliance

The following table lists the regulatory compliance of your Precision 7960 Tower.

Table 26. Regulatory compliance


| Regulatory compliance |
|--|
| Product Safety, EMC and Environmental Datasheets |
| Dell Regulatory Compliance Home page |
| Dell and the Environment |

Operating and storage environment

This table lists the operating and storage specifications of your Precision 7960 Tower.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 27. Computer environment

| Description | Operating | Storage |
|--|---|--|
| Temperature range | 5°C to 35°C (41°F to 95°F) | -40°C to 65°C (-40°F to 149°F) |
| Relative humidity (maximum) | 10% to 90% (non-condensing) | 0% to 95% (non-condensing) |
| Vibration (maximum)* | 0.66 GRMS | 1.30 GRMS |
| Shock (maximum) | 110 G† | 160 G† |
| Altitude range | -15.2 m to 3048 m (-49.87 ft to 10000 ft) | -15.2 m to 10668 m (-49.87 ft to 35000 ft) |
|  CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components. | | |

* Measured using a random vibration spectrum that simulates the user environment.


† Measured using a 2 ms half-sine pulse.

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 28. Self-help resources

| Self-help resources | Resource location |
|--|---|
| Information about Dell products and services | www.dell.com |
| Tips |  |
| Contact Support | In Windows search, type <code>Contact Support</code> , and press Enter. |
| Online help for operating system | www.dell.com/support/windows www.dell.com/support/linux |
| Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents. | Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer . |
| Dell knowledge base articles | <ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles. |

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.