

Overview

HP ZBook x2 G4 Detachable Workstation




Overview



Front

- | | |
|------------------------------------|------------------------------------|
| 1. IR LED | 8. HP Quick Key – Mode Select |
| 2. Microphones | 9. HP Quick Key |
| 3. RGB Camera | 10. HP Quick Key (Supports 1 Mode) |
| 4. IR Camera | 11. HP Quick Key (Supports 1 Mode) |
| 5. 3 Mode LEDs | 12. Large Clickpad |
| 6. HP Quick Key (Supports 3 Modes) | |
| 7. HP Quick Key (Supports 3 Modes) | |


Overview

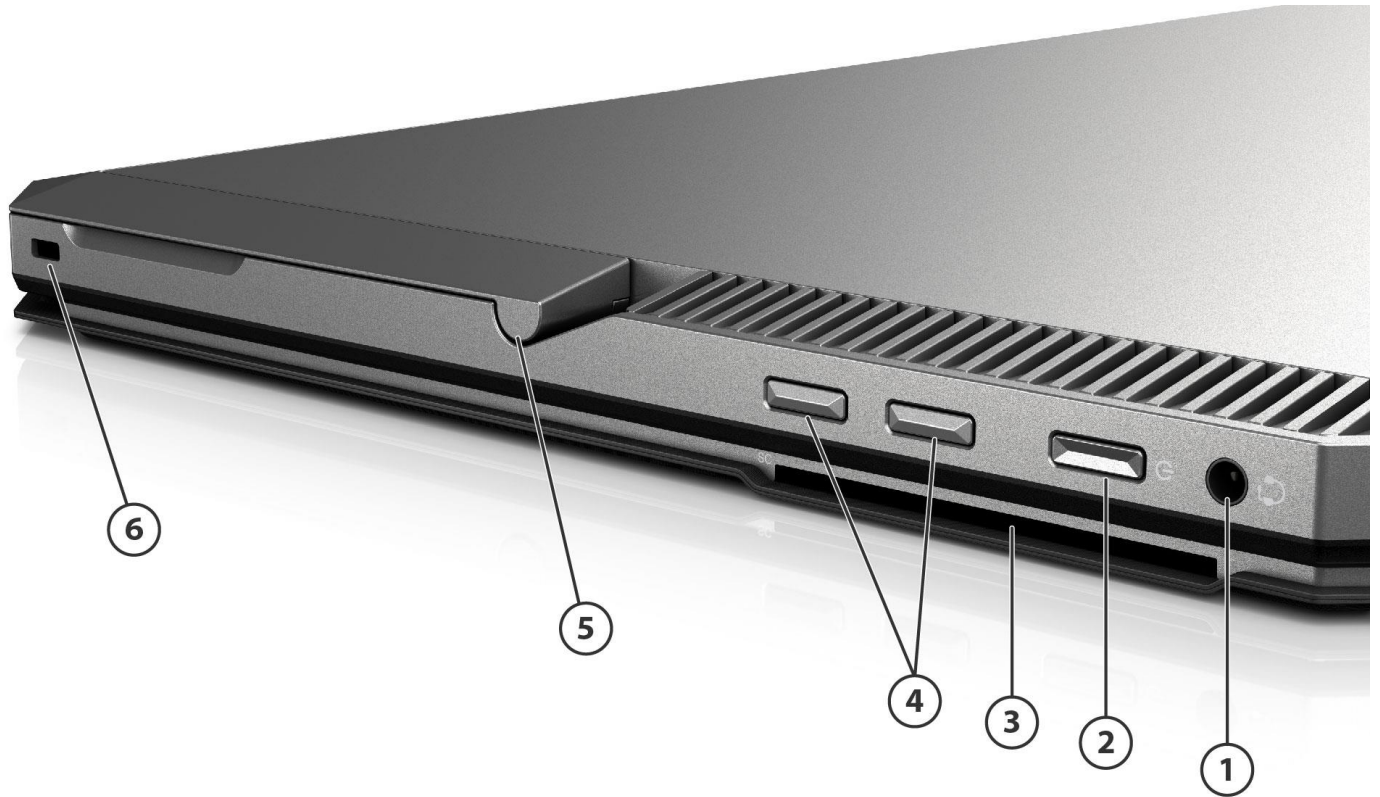

Left

- | | |
|--|-------------------------|
| 1. Combo headset | 4. (2) Volume Up/Down |
| 2. Power | 5. Integrated Kickstand |
| 3. Smart card (on Detachable keyboard) | 6. Security lock slot |

Overview

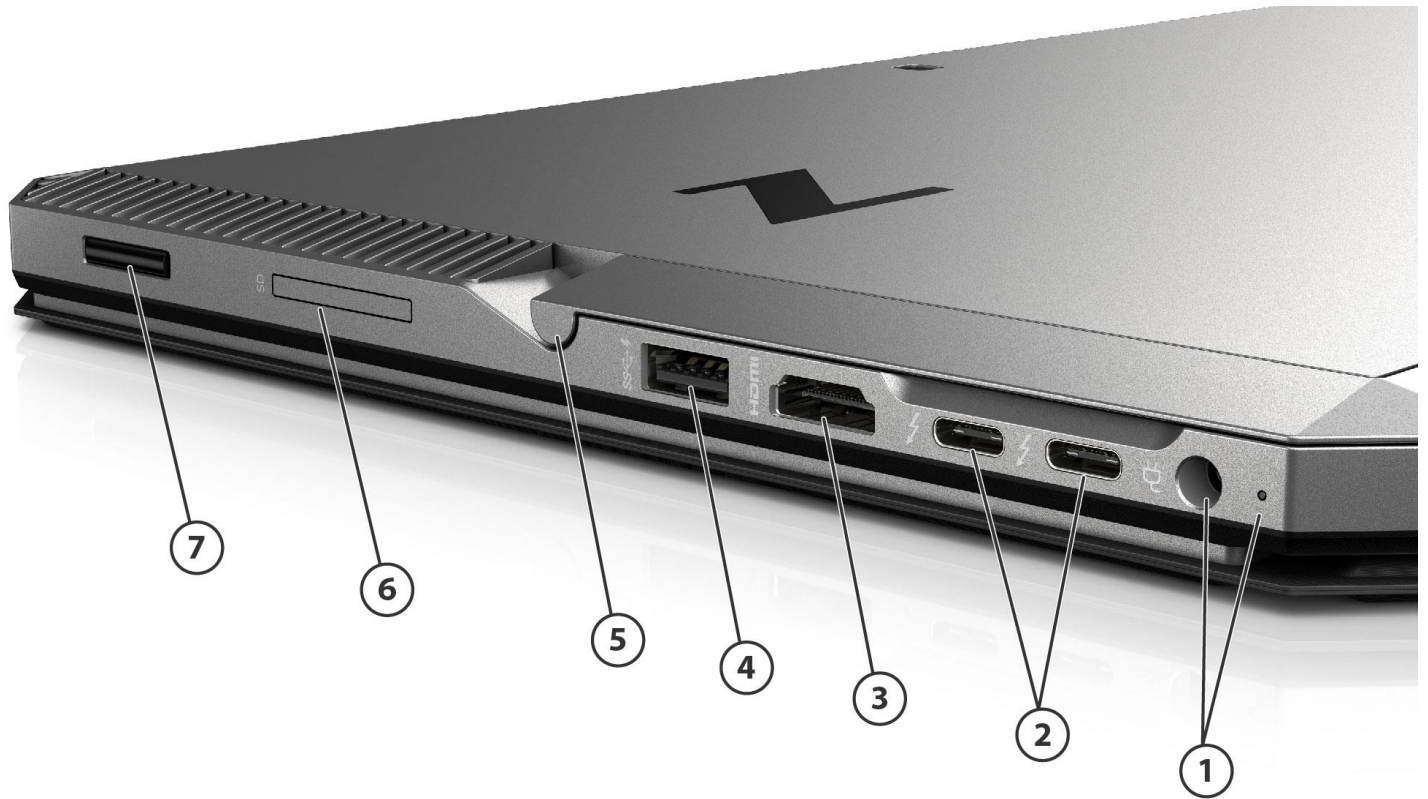

Right

- | | |
|-----------------------------|-------------------------|
| 1. Power connector with LED | 5. Integrated Kickstand |
| 2. (2) Thunderbolt™ 3 Ports | 6. SD Card slot |
| 3. HDMI 1.4 | 7. Fingerprint reader |
| 4. USB 3.0 (Charging) port | |

Overview

At A Glance

- Windows 10 editions, or FreeDOS
- Versatile performance workstation category and thin & light detachable industrial design
- Weights starting at 4.78 lb (2.17kg) (laptop mode) and 3.64 lb (1.65 kg) (Tablet mode)
- Height starting at 20.3 mm (Laptop mode) and 14.6 mm (Tablet mode)
- Designed to pass military MIL-STD-810G testing*.
- Discrete Graphics: Workstation-caliber NVIDIA® Quadro® discrete graphics, NVIDIA® Quadro® M620 (with 2GB dedicated GDDR5 graphics memory); NVIDIA® Optimus®.
- Integrated Graphics:
 - Intel® Integrated graphics: Intel® UHD 620 graphics integrated on 8th gen Core™ i5 and i7 (available as a standalone option on Core i5)
 - Intel® Integrated graphics: Intel® HD 620 graphics integrated on 7th gen Core™ i7
- ISV certified to provide fast and reliable performance with workstation applications, including manipulation of 3D textures
- Choice of 8th generation Intel® Core™ i7 and i5 processors and 7th generation Intel® Core™ i7¹
- Intel® Core™ i7 with vPro™ 7th generation technology (optional)
- Memory: Up to two SODIMM channels, for system memory up to 32GB DDR4
- Displays supported: 14.0-inch diagonal 4K UHD UWVA display w/ multi-touch & anti-glare treatment; 14.0-inch diagonal 4K UHD HP DreamColor UWVA display w/ multi-touch and anti-glare treatment (10 bit supporting up to 1 billion colors)
- Supports multi-display, including up to three displays without the use of a docking solution, with hybrid graphics enabled. Supports up to five with HP ZBook Dock with Thunderbolt™ 3 (sold separately), with hybrid graphics enabled. Supports up to four with HP ZBook Dock with Thunderbolt™ 3 (sold separately), with HP DreamColor configurations.
- Bang and Olufsen audio optimized for high fidelity audio experience
- Full size premium backlight Bluetooth Keyboard with large clickpad with gestures support; 1.5mm of keyboard travel and 18.7mm pitch; integrated smart card reader
- Stay productive with 2 x Thunderbolt™ 3 ports at max supported bandwidth (PCIe Gen 3x4) One dedicated drive slots. (1) M.2 slot; Up to 2TB HP Z Turbo Drive G2²
- Professional high performance pen experience³ with ergonomic pen design enabling precise creative control through low starting pressure, low latency, tilt support, 4,096 pressure sensitive levels and seamlessly works requiring no power source – (no battery or Bluetooth® pairing required). Creative professional design includes customizable button, dedicated pressure sensitive eraser and starter set of both POM & Felt Nibs for maximum expressiveness on anti-glare texturized screen surface. The creative experience is enhanced further by strategically located HP Quick Key buttons on both sides of the ZBook x2's industrial design for easy access to application specific functions that are user customizable to maximize overall workflow for a wide variety of professional applications including Adobe Photoshop, Lightroom, and Illustrator HP Create Control panel software enables full control & customization of all HP Quick Keys and Pen settings for both professional applications and Windows 10.
- Preinstalled with Adobe Creative Cloud Desktop Application for easy access to commonly used Adobe CC applications. Adobe Creative Cloud Suite (sold separately)
- Security features including an IR camera for face authentication with Windows Hello, TPM 2.0, HP SureStart Gen3, and hardware security options like Smart Card Reader integrated into the keyboard, Fingerprint Reader, Optional vPro™ 7th generation, Security lock slot
- 4-cell (70 WHr) HP Long Life Battery with HP Fast Charge Technology
- Wireless connectivity options:
 - Intel® Dual band wireless-AC 8265 802.11AC 2x2 WiFi + BT 4.2 Combo Adapter (vPro™ 7th generation)
- HP Performance Advisor for optimal configuration, compatibility and performance
- HP BIOS self-healing technology including HP Sure Start Gen 3 to prevent, detect, and remedy known and unknown BIOS attacks.
- Low halogen, ENERGY STAR® certified and EPEAT® TBD registered in the U.S. EPEAT® status varies by country- please see epeat.net for registration status by country. Search keyword generator on HP's 3rd party option store for solar generator accessories at www.hp.com/go/options

Overview

* MIL STD 810G testing is pending and is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Damage under the MIL STD test conditions or any accidental damage requires an optional HP Accidental Damage Protection Care Pack.

NOTE 1: Intel® Core™ 8th gen is planned to be available in early 2018

NOTE 2: 2TB HP Z Turbo Drive G2 is planned to be available in early 2018

NOTE 3: HP Zbook x2 Pen sold separately, it is available as an After Market Option TBD

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Features

OPERATING SYSTEM

Preinstalled OS Windows® 10 Pro 64¹
Windows® 10 Home 64¹
Windows 10 Home Single Language 64¹
FreeDOS 2.0

Supported OS Windows® 10 Enterprise 64*

* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>

NOTE: Your product does not support Windows 8 or Windows 7

In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel® and AMD 7th generation and forward processors or provide any Windows® 8 or Windows 7 drivers on <http://www.support.hp.com>

PROCESSOR*, **

Intel® Core™ i7-8650U with Intel® UHD Graphics 620 (1.9 GHz base frequency, up to 4.2 GHz with Intel® Turbo Boost Technology 8 MB, 4 cores)

Intel® Core™ i7-8550U with Intel® UHD Graphics 620 (1.8 GHz base frequency, up to 4.0 GHz with Intel® Turbo Boost Technology, 8 MB cache, 4 cores)

Intel® Core™ i5-8250U with Intel® UHD Graphics 620 (1.6 GHz base frequency, up to 3.4 GHz with Intel® Turbo Boost Technology, 6 MB cache, 4 cores)

Intel® Core™ i7-7600U with Intel® HD Graphics 620 (2.8 GHz base frequency, up to 3.9 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)

Intel® Core™ i7-7500U with Intel® HD Graphics 620 (2.7 GHz base frequency, up to 3.5 GHz with Intel® Turbo Boost Technology, 4 MB cache, 2 cores)

*Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

**HP ZBook x2 G4 detachable pc is planned to be available for shipment with the above Intel® 7th generation processors in December 2017 and Intel 8th Gen processors in early 2018.

Also note that the Intel® Turbo Boost is based on max GHz for a single core.

Features

CHIPSET

Non-applicable, processor specific

INTEL® CORE™ I5/CORE I7 WITH vPro™ TECHNOLOGY CAPABLE

7th generation Intel® Core™ i5 with vPro™ and Core™ i7 with vPro™ technology is a selectable feature that is available on units configured with select processors, a qualified Intel® Centrino® WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel® Active Management Technology (iAMT) offers built-in manageability and proactive security for networked mobile workstations, even when they are powered off* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update mobile workstations regardless of their power state.

* Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

NOTE: Some functionality of 7th generation Intel® Core™ i5 with vPro™/Core™ i7 with vPro™ technology, such as Intel® Active Management technology and Intel® Virtualization technology, requires additional third- party software in order to run. Availability of future "virtual appliances" applications for Intel® Core™ i5 with vPro™/Core™ i7 with vPro™ technology is dependent on third- party software providers. Compatibility with future "virtual appliances" is yet to be determined.

GRAPHICS

Intel® HD 620 Graphics*

NVIDIA® Quadro® M620 with 2GB dedicated GDDR5 graphics memory^{1,2}

Microsoft DirectX® 12 (Shader Model 5.0) and OpenGL® 4.4 capable

* HD content required to view HD images

NOTE 1: NVIDIA® Optimus® Technology supported

NOTE 2: Supports up to 5 independent displays, These five displays are internal panel plus four external displays connected to the ZBook dock's Thunderbolt™ 3, VGA, and two DisplayPort™ 1.2 ports (sold separately).

DisplayPort™ 1.2 protocol features supported on Thunderbolt™ 3 ports:

- Legacy displays (HDMI, DVI, VGA) may be attached to Thunderbolt™ port with the use of a certified dongle.
- DisplayPort™ monitors capable of supporting DisplayPort™ 1.2 may be directly attached to the Thunderbolt™ port to achieve HBR2 with the use a dongle.
- Thunderbolt™ 3 enabled monitors may be directly attached to the Thunderbolt port to achieve HBR2 and MST.
- DisplayPort™ 1.2 MST feature ("daisy-chain" feature) is supported through Thunderbolt™ 3 port on Thunderbolt™ 3 enabled devices or DisplayPort™ 1.2 monitors (requires monitor with DisplayPort™ 1.2 MST capability) with the use of a dongle.
- Up to 2 streams (eight lanes) of DisplayPort™ 1.2 are supported over a single Thunderbolt™ 3 port. Up to (2) 4K displays 24/30-bit color depth at 60 Hz or (1) 5K display supported over a single Thunderbolt™ 3 port. (Requires Intel® certified Thunderbolt™ cable).

Features

- DisplayPort™ 1.2 w/MST (Multi-stream Transport): Supports resolutions up to Full 4K, 24/30-bit color depth at 60 Hz, and WUXGA (1920 x1200) monitors, 24/30-bit color depth at 120 Hz.

* Thunderbolt™ 3 is superset port supporting DisplayPort™ 1.2, USB 3.1 Gen 2, and PCIe Gen 3 devices over the new USB-C™ connector. Install all the latest drivers for your Thunderbolt™ device before connecting the device to the Thunderbolt™ port. Thunderbolt™ cable and Thunderbolt™ device (sold separately) must be compatible with Windows. To determine whether your device is Thunderbolt™ Certified for Windows, see <https://Thunderbolttechnology.net/products>.

Multi-display Support

Without ZBook Dock with Thunderbolt™ 3:

HP ZBook x2 with hybrid graphics and without the use of the ZBook dock supports up to a maximum of three independent displays. These three displays are the internal panel plus two external displays connected to two of the three following ports: HDMI 1.4, Thunderbolt™ 3, Thunderbolt™ 3.

HP ZBook x2 with HP DreamColor configurations (discrete graphics only mode enabled) and without the use of the ZBook dock supports up to a maximum of three independent displays. These three displays are the internal panel plus two external displays connected to two of the three following ports: HDMI 1.4, Thunderbolt™ 3, Thunderbolt™ 3.

HP ZBook x2 configuration with Intel® integrated graphics and without the use of the ZBook dock supports up to a maximum of three independent displays. These three displays are the internal panel plus two external displays connected to two of the three following ports: HDMI, Thunderbolt™ 3, Thunderbolt™ 3.

With ZBook Dock with Thunderbolt™ 3:

The ZBook Dock with Thunderbolt™ 3 has a Thunderbolt™ 3 port, VGA port, and two DisplayPort™ 1.2 ports.

When used together with the HP ZBook x2 configuration with hybrid graphics, a maximum of 5 independent displays are supported. These five displays are internal panel plus four external displays connected to the ZBook dock's Thunderbolt™ 3, VGA, and two DisplayPort™ ports.

When used together with the HP ZBook x2 with HP DreamColor configurations (discrete graphics only mode enabled), a maximum of 4 independent displays are supported.

When used together with the HP ZBook x2 configuration with Intel® integrated graphics, a maximum of 3 independent displays are supported.

Without ZBook Dock with Thunderbolt™ 3 (using DP 1.2 MST)

Multi-stream Transport (MST) is a DP 1.2 feature that allows daisy chaining of DP 1.2 monitors (requires built in support of DP 1.2 MST in monitor), or the use of DP 1.2 hubs with MST to achieve 5 active displays without a docking station on configurations with hybrid graphics enabled.

* HP ZBook Dock with Thunderbolt™ 3 sold separately.

Features

DISPLAY

Touch

14.0-inch diagonal LED-backlit UHD Anti-glare UWVA Touch (3840 x 2160) – 10 bit (8+2 FRC) – Support for 1 billion colors
14.0-inch diagonal LED-backlit UHD DreamColor Anti-glare UWVA Touch (3840 x 2160) – 10 bit (8+2 FRC) – Support for 1 billion colors

External

Up to 32-bit per pixel color depth

HDMI

HDMI 1.4

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage Bay

M.2 PCIe (NVMe) SSD TLC

256GB PCIe TLC Solid State Drive
512GB PCIe TLC Opal 2 Solid State Drive
1TB PCIe TLC Solid State Drive
2TB PCIe TLC Solid State Drive

M.2 PCIe (NVMe) SSD MLC

256GB HP Z Turbo Drive MLC Solid State Drive
512GB HP Z Turbo Drive MLC Solid State Drive

M.2 SATA SSD

512GB SATA-3 SS TLC SSD FIPS-140-2
128 GB SATA SATA SSD

NOTE: For Solid State Drives or Hard Drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) is reserved for system recovery software.

Features

DRIVE CONTROLLERS

M.2 Storage Bay (SATA):	SATA-3 for SSD
HP Z Turbo Drive:	PCIe NVMe SSD
RAID:	Not supported

NOTE: Raid 0, 1 supported only on SATA drives.

MEMORY

Standard

32 GB DDR4 1.2V Non ECC SDRAM (Transfer rates up to 2133MT/s)
Two SODIMM slots supporting dual-channel memory
4 GB, 8GB and 16 GB SODIMMs

Maximum

Upgradeable to 32768 MB with optional 16384 MB SODIMMs in 2 slots

Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory channels.

* Maximum memory capacities assume Windows 64-bit operating systems or Linux®. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

NETWORKING/COMMUNICATIONS

Wireless

Secure, integrated wireless LAN options featuring support for the latest industry standards. Integrated Bluetooth® is also available (factory configurable only) and is combined with the supported wireless LAN feature.

802.11 Wireless LAN*

Intel® Dual Band Wireless-AC 8265 802.11 a/b/g/n/ac (2x2) WiFi + Bluetooth® 4.2 Combo Adaptor* (vPro)

NFC Support

Assembly on Detachable keyboard
Near Field Communications (NFC)
Integrated NXP NFC Controller NPC100

* Wireless cards are optional or add-on features and requires separately purchased wireless access point and internet service. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

AUDIO/MULTIMEDIA

Features

Audio

Audio by Bang & Olufsen

Integrated stereo speakers (2)

Integrated dual-microphone array; located in the display

Two discrete buttons for volume up and down

Combo mic-in / stereo headphone-out jack

Intel® Smart Sound Technology (Windows 10)

Front Camera

720 HD webcam with IR (Near infrared imaging)

- Microsoft Hello Certification: Microsoft face authentication in Windows 10 is an enterprise-grade identity verification mechanism
- Microsoft Skype for Business¹ Certified
- HD format (widescreen 16:9)
- Supports videoconferencing and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range

World Facing Camera

World Facing Camera (8MP USB3.0)

- Supports videoconferencing and still image capture
- High quality auto-focus lens
- Still capture at various resolutions up to 8MP (4:3)
- Video capture at various resolutions up to 1920x1080 (1080p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range

* HD content required to view HD images.

* Windows Hello face authentication utilizes a camera specially configured for near infrared (IR) imaging to authenticate and unlock Windows devices as well as unlock your Microsoft Passport.

1. Skype is not offered in China.

Features

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Full size Bluetooth Keyboard

The ZBook x2 Bluetooth® keyboard delivers a best in class typing experience using a stiffened anodized aluminum deck and keys uniquely designed for ideal contouring, separation, and size. Class leading 1.5 mm of keyboard travel. The addition of patterned polyurethane material nicely contrasts the smooth aluminum for a feel of comfort and a tailored appeal. This helps reduce the risk of damage to sensitive components underneath.

Backlit keyboard supports backlit brightness settings - off/full/half brightness

The 85-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, function keys, and 18.7 x 18.4 mm key pitch (center-to-center spacing).

U.S. and International key layouts are available. For North America, a US/Euro Spanish Keyboard option now available. Other features include hot keys for instant access to power conservation and brightness.

Pointing Devices

Extra large clickpad with On/Off button, two-way scroll, gestures, two integrated buttons within chemically etched clickpad surface

Image sensor clickpad for enhanced performance and improved precision on scroll and gesture.

Buttons and Function Keys

Power button

Volume control buttons

HP Quick Keys located on left and right side of the device

Function keys provide control of the following features: standby mode, external display, volume down, volume up, and display brightness.

SOFTWARE AND SECURITY

Preinstalled Software with Windows® Operating System

BIOS

HP BIOSphere Gen3¹

HP Sure Start Gen3²

HP DriveLock | HP Automatic DriveLock

BIOS Update via Network

Master Boot Record Security

Power On Authentication

Secure Erase³

Absolute Persistence Module⁴

Pre-boot Authentication

Communication / Connectivity

HP Mobile Connect Pro⁵

Native Miracast Support⁶

HP LAN-WLAN Protection

HP MAC Address Manager (select models only)

Features

HP Wireless Wakeup (select models only)

HP SureConnect

Adobe Productivity Software

Adobe Creative Cloud Desktop Manager Application

Adobe Creative Cloud Suite

HP Value Add Software

HP ePrint Driver + JetAdvantage⁷

HP Hotkey Support

HP Recovery Manager

HP Jumpstart

HP Support Assistant¹²

HP Noise Cancellation Software

HP Performance Advisor

HP Remote Graphics Software

HP Velocity

Microsoft Products

Buy Office

Bing Search

Skype⁸

Manageability

HP Driver Packs⁹

HP SoftPaq Download Manager (SDM)

HP System Software Manager (SSM)⁹

HP BIOS Config Utility (BCU)⁹

HP Client Catalog⁹

HP Manageability Integration Kit for Microsoft SCCM¹⁰

HP Image Assistant

LANDESK Management¹¹

For more information on HP Client Management Solutions refer to: <http://www.hp.com/go/clientmanagement>.

Client Security Software

HP Client Security Suite Gen3¹³

HP Security Manager (including Credential Manager and Password Manager)

HP Fingerprint Sensor

Power On Authentication

Device Access Manager

Microsoft Defender¹⁴

HP WorkWise¹⁵

Standard

For Windows 10, Trusted Platform Module (TPM) 2.0 (Infineon SLB9670). Common Criteria EAL4+ Certified.

Features

HP Fingerprint Reader

For more information on HP Client Security Software Suite, refer to <http://www.hp.com/go/clientsecurity>.

1. Requires Intel® 7th generation processors
2. Available on HP Elite products equipped with Intel® 7th generation processors.
3. For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.
4. Absolute agent is shipped turned off, and will be activated when customers activate a purchased subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S. The Absolute Recovery Guarantee is a limited warranty. Certain conditions apply. For full details visit: <http://www.absolute.com/company/legal/agreements/computrace-agreement>. Data Delete is an optional service provided by Absolute Software. If utilized, the Recovery Guarantee is null and void. In order to use the Data Delete service, customers must first sign a Pre-Authorization Agreement and either obtain a PIN or purchase one or more RSA SecurID tokens from Absolute Software.
5. HP Mobile Connect Pro is only available on preconfigured devices with WWAN. For geographic availability refer to <http://www.hp.com/go/mobileconnect>
6. Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>
7. Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see <http://www.hp.com/go/eprintcenter>). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.
8. Skype is not offered in China.
9. Not preinstalled, however available for download at <http://www.hp.com/go/clientmanagement>
10. HP Manageability Integration Kit can be downloaded from <http://www8.hp.com/us/en/ads/clientmanagement/overview.html>
11. Subscription required.
12. Requires Windows and Internet Access
13. Requires Windows and Intel® 7th generation processors.
14. Opt in and internet connection required for updates
15. HP WorkWise smartphone app is available as a free download on the App Store and Google Play. As of September 2017, HP WorkWise will no longer support iOS or iPhone® devices.

Workstation ISV Certifications

Find the latest list of certifications at: <http://www.hp.com/go/isv>

HP Performance Advisor

HP Performance Advisor enables optimal configuration of HP Mobile Workstations delivering stability and best performance. HP Performance Advisor will guide your system setup allowing a "custom" configuration that best matches the workstation to user requirements.

Download at: <http://www.hp.com/go/performanceadvisor>

Security

See Software section above.

Other Standard Security Features

Smart Card Reader integrated into keyboard

One-Step Logon

Security lock slot

Support for Intel® AT

Optional Security Features

Features

HP Fingerprint Sensor (optional)

HP CENTRAL MANAGEMENT

HP offers a variety of scalable hardware, software, and BIOS-based security features to help you defend your organization against viruses and other threats. These integrated security features safeguard what matters to you the most - your data, device and identity. Now, be confident your fleet of devices is protected in multiple layers of HP Client Security protection.

HP BIOS Protection keeps you up and running with enhanced protection against virus attacks and other threats. And if the BIOS is accidentally compromised, the auto recovery feature automatically restores it to its fully functional state.

HP Sure Start detects and negates a BIOS attack with automatic recovery of the BIOS even when the installation is accidentally compromised (i.e. power outage). When HP Sure Start heals the BIOS an event log is generated that an IT administrator can retrieve so the business is aware of a BIOS attack. Golden copy of BIOS is stored in protected nonvolatile memory providing redundant, hardware-based protection against a new generation of attacks. This helps to future-proof your technology and business.

An optional fingerprint reader to help keep your identity secure. The security cable slot helps keep your notebook physically secure.

You can even permanently destroy data on your hard drive in preparation for your system disposal or redeployment with Secure Erase.

Features

POWER

Power Supply

HP 65W Smart AC Adapter (Configurations with Intel® HD graphics only; Does not support HP Fast Charge)

HP 65W EM Smart AC Adapter

HP 90W Smart AC Adapter (Supports HP Fast Charge)

Primary Battery

HP 4-cell Long Life Polymer Battery (70 WHr)

NOTE: Battery is internal and no replaceable by the costumer

Battery Life

Battery life up to 10 hours * (Hybrid Graphics configurations and Intel® HD graphics configurations)

System Standby Time

Up to TBD weeks**

* Windows 10 MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See <http://www.bapco.com> for additional details.

** Standby life will vary depending on various factors including battery, Memory, CPU, EC and LAN chip. The maximum capacity of the battery will naturally decrease with time and usage.

Power Conservation

NVIDIA® Optimus®

Hibernation

Standby

ACPI compliance

ENVIRONMENTAL DATA

Eco-Label Certifications & declarations

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- IT ECO declaration
- US ENERGY STAR®
- EPEAT[®] Gold registered in the United States. See <http://www.epeat.net> for registration status in your country. Search keyword *generator* on HP's 3rd party option store for solar energy accessory at <http://www.hp.com/go/options>.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".

Energy Consumption (in accordance with US

115VAC, 60Hz

230VAC, 50Hz

100VAC, 50Hz

Features

ENERGY STAR® test method)

Normal Operation (Short idle)	12.18 W	12.45 W	12.72 W
Normal Operation (Long idle)	4.04 W	4.30W	3.93 W
Sleep	0.68 W	0.68 W	0.68 W
Off	0.51 W	0.51 W	0.51 W

Note:

Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for computers. If a model family does not offer ENERGY STAR® compliant configurations, then energy efficiency data listed is for a typically configured PC featuring a hard disk drive, a high efficiency power supply, and a Microsoft Windows® operating system.

Heat Dissipation*

	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz
Normal Operation (Short idle)	42 BTU/hr	43 BTU/hr	44 BTU/hr
Normal Operation (Long idle)	14 BTU/hr	15 BTU/hr	13 BTU/hr
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

	Sound Power (L _{wAd} , bels)	Sound Pressure (L _{pAm} , decibels)
Typically Configured – Idle	2.3	21
Fixed Disk – Random writes	2.3	22

Longevity and Upgrading

This product can be upgraded, possibly extending its useful life by several years. Upgradeable features and/or components contained in the product may include:

- 3 USB ports
- 1 PC card slot (type I/II)
- 1 ExpressCard/54 slot
- 1 IEEE 1394 Port
- 2 SODIMM memory slots
- Optional expansion base docking station
- 1 multi-bay II storage port
- Interchangeable HDD??

Spare parts are available throughout the warranty period and or for up to “5” years after the end of production.

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:
Mercury greater the 1ppm by weight
Cadmium greater than 20ppm by weight

Features

Battery description: CR2032 (coin cell)
 Battery type: Lithium

Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2011/65/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the gold level, see www.epeat.net
- Plastics parts weighing over 25 grams used in the product are marked per ISO11469 and ISO1043.
- This product contains 0% post-consumer recycled plastic (by wt.)
- This product is 93.8% recycle-able when properly disposed of at end of life.

Packaging Materials

External:	PAPER/Corrugated	608 g
	PAPER/Paperboard	791 g
	PAPER/Molded Pulp	278 g
Internal:	PLASTIC/Polyethylene Expanded - EPE	93 g
	PLASTIC/Polypropylene - PP	18 g
	PLASTIC/Polyethylene high density - HDPE	13 g
	PLASTIC/Polyethylene low density - LDPE	10 g

The plastic packaging material contains at least 0% recycled content.

The corrugated paper packaging materials contains at least 80% recycled content.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf>):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Features

Packaging Usage

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

HP, Inc. Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www8.hp.com/us/en/hp-information/environment/ecolabels.html>

ISO 14001 certificates:

<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842>

and

<http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf>

Features

WEIGHTS & DIMENSIONS

Weight

Starting at 4.78 lbs (2.17 kg) (laptop mode) and 3.64 lbs (1.65 kg) (Tablet mode)

Dimensions (w x d x h)

20.3 x 364.5 x 227 mm (h x w x d) – Mobile workstation laptop mode

0.80 x 14.35 x 8.94 in (h x w x d) – Mobile workstation laptop mode

14.6 x 364.5 x 227 mm (h x w x d) – detachable workstation tablet mode

0.57 x 14.35 x 8.94 in (h x w x d) – detachable workstation tablet mode

NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 4 cell 70Whr battery, without hard drive and with 256 GB Z Turbo Drive (PCIe SSD).

PORTS/SLOTS

Ports

Left side:

- (1) Stereo microphone in / headphone-out combo jack
- (1) Security lock slot

Right side:

- (1) Power Connector
- (2) Thunderbolt™ 3 (supporting DP 1.2, USB 3.1 Gen2, PCIe Gen 3 devices)
- (1) HDMI 1.4
- (1) USB 3.0 (Charging)

Thunderbolt™ 3

Thunderbolt™ 3 ports supports DisplayPort™ 1.2, USB 3.1 Gen 2, and PCIe Gen 3 devices over the new USB-C port connector. The port is compatible with existing DisplayPort™ displays, devices, and cables. Install all the latest drivers for your Thunderbolt™ device before connecting the device to the Thunderbolt™ port. Thunderbolt™ cable and Thunderbolt™ device (sold separately) must be compatible with Windows®. To determine whether your device is Thunderbolt™ Certified for Windows®, see <https://Thunderbolttechnology.net/products>.

Digital Media Slots

- (1) Integrated SD flash media slot (RT5237S)- supports SD, SDHC, SDX
-

Features

SERVICE AND SUPPORT

Limited 3-year, 1-year or 90-day limited warranty options available, depending on country. Long Life batteries which will have same 1-year or 3-year limited warranty as the platform. 24/7 operation will not void the HP warranty. Optional¹ HP Care Pack Services² are extended service contracts which go beyond your standard limited warranties.

1. Sold separately or as an optional feature.
 2. HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. Consult the HP Customer Support Center for details. For details, visit www.hp.com/go/cpc. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.
-

Technical Specifications – Displays

SYSTEM UNIT

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	19.5 V dc @ 3.3 A		
	Average Operating Power		Windows® 10 (32-bit)	Windows® 10 (64-bit)
		NVIDIA® Quadro® Graphics	16.28 W	16.8 W
Temperature	Max Operating Power	< 65 W		
	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)		
	Non-operating	-4° to 140° F (-20° to 60° C)		
Relative Humidity	Operating	10% to 90%, non-condensing		
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature		
Shock	Operating	40 G, 2 ms, half-sine		
	Non-operating	200 G, 2 ms, half-sine		
Random Vibration	Operating	0.75 grms		
	Non-operating	1.50 grms		
Altitude (unpressurized)	Operating	-50 to 10,000 ft. (-15.24 to 3,048 m)		
	Non-operating	-50 to 15,000 ft. (-15.24 to 12,192 m)		
Planned Industry Standard Certifications	UL	Yes		
	CSA	Yes		
	FCC Compliance	Yes		
	ENERGY STAR®	Select models*		
	EPEAT®	Gold**		
	ICES	Yes		
	Australia / NZ A-Tick Compliance	Yes		
	CCC	Yes		
	Japan VCCI Compliance	Yes		
	KCC	Yes		
	BSMI	Yes		
	CE Marking Compliance	Yes		
	MIL STD***	Planned		

* Configurations of the HP ZBook x2 G4 that are ENERGY STAR® certified are identified as HP ZBook x2 G4 ENERGY STAR® on HP websites and on <http://www.energystar.gov>.

** EPEAT registration varies by country. See <http://www.epeat.net> for registration status by country. EPEAT status listed above applies to U.S. Search keyword generator on HP's 3rd party option store for solar generator accessories at <http://www.hp.com/go/options>

*** MIL STD 810G testing is pending and is not intended to demonstrate fitness for U.S. Department of Defense contract requirements or for military use. Test results are not a guarantee of future performance under these test conditions. Damage under the MIL STD test conditions or any accidental damage requires an optional HP Accidental Damage Protection Care Pack.

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

Technical Specifications – Displays

DISPLAYS*

14.0-inch 4K UHD UWVA IPS LED w/ multi-touch and anti-glare (3840 x 2160)	Active Area (W x H)	13.62 x 7.59 in (34.6 x 19.4 cm)		
	Dimensions (W x H)	14.0 in (35.56 cm)		
	Weight	345 g (max)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	1000:1 (typ)		
	Refresh Rate	60 Hz		
	Brightness	300 nit typical		
	Pixel Resolution	Format	3840 x 2160 (UHD)	
		Configuration	RGB Stripe	
	Backlight	LED		
	PPI	283		
Viewing Angle	85/85/85/85 (Left/Right/Down/Up) (typical)			

14.0-inch 4K UHD HP DreamColor UWVA IPS LED w/ multi-touch and anti-glare (3840 x 2160)	Dimensions (W x H)	13.62 x 7.59 in (34.6 x 19.4 cm)		
	Diagonal Size	14.0 in (35.56 cm)		
	Weight	345 g (max)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	1000:1 (typ)		
	Refresh Rate	60 Hz		
	Brightness	300 nit typical		
	Pixel Resolution	Format	3840 x 2160 (UHD)	
		Configuration	RGB Stripe	
	Backlight	LED		
	PPI	283		
Viewing Angle	85/85/85/85 (Left/Right/Down/Up) (typical)			

* All specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Technical Specifications – Storage and Drives

STORAGE AND DRIVES

Internal Storage

**128 GB M2 2280 SATA-3
TLC Solid State Drive**

Drive Weight	0.019 lb (8.5 g)-0.022 lb (10 g)	
Capacity	128 GB	
Height	0.09 in (2.23 mm)- 0.14 in (3.58 mm)	
Width	0.87 in (22 mm)	
Interface	ATA-8, SATA 3.0	
Performance	Maximum Sequential Read	Maximum Sequential Write
	Up to 540 MB/s	Up to 300 MB/s
Logical Blocks	250,069,680	
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]	
Features	ATA Security, DIPM; TRIM; DEVSLP	

System Technical Specifications

HP Z Turbo Drive 512 GB, M.2 NVMe MLC Solid State Drive	Drive Weight	0.022 lb. (10 g)		
	Capacity	512 GB		
	Height	0.14 in (3.7 mm)		
	Width	0.87 in (22 mm)		
	Generation	NVMe		
	NAND Type	MLC		
	Form-Factor (I/O)	M.2 2280		
	Interface	PCIe GEN3X4		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 2260MB/s	Up to 1600MB/s	
	Logical Blocks	1,000,215,216		
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]			
Features	ATA Security; TRIM; L1.2			

HP Z Turbo Drive 256 GB, M.2 NVMe MLC Solid State Drive	Drive Weight	0.022 lb. (<10 g)		
	Capacity	256 GB		
	Height	0.09 in (2.3 mm)		
	Width	0.87 in (22.1 mm)		
	Generation	NVMe		
	NAND Type	MLC		
	Form-Factor (I/O)	M.2 2280		
	Interface	PCIe GEN3X4		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 2260MB/s	Up to 1260 MB/s	
	Logical Blocks	500,118,192		
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]			
Features	ATA Security; TRIM; L1.2			

HP Z Turbo Drive 256 GB, M.2 NVMe TLC Solid State Drive	Drive Weight	0.022 lb (<10 g)		
	Capacity	256 GB		
	Height	0.09 in (2.3 mm)		
	Width	0.87 in (22 mm)		
	Generation	NVMe		
	NAND Type	TLC		
	Form-Factor (I/O)	M.2 2280		
	Interface	PCIe GEN3X4		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 2600MB/s	Up to 900 MB/s	
	Logical Blocks	500,118,192		
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]			

System Technical Specifications

	Features	ATA Security, TRIM; L1.2		
HP Z Turbo Drive 512 GB, M.2 NVMe TLC Opal 2 Solid State Drive	Drive Weight	0.022 lb (<10 g)		
	Capacity	512 GB		
	Height	0.09 in (2.3 mm)		
	Width	0.87 in (22 mm)		
	Generation	NVMe		
	NAND Type	TLC		
	Form-Factor (I/O)	M.2 2280		
	Interface	PCIe GEN3X4		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 1800MB/s	Up to 980 MB/s	
	Logical Blocks	500,118,192		
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]		
	Features	ATA Security, TRIM; L1.2		
HP Z Turbo Drive 1TB, M.2 NVMe TLC Solid State Drive	Drive Weight	0.022 lb (<10 g)		
	Capacity	1TB		
	Height	0.14 in (3.7 mm)		
	Width	0.87 in (22 mm)		
	Generation	NVMe		
	NAND Type	TLC		
	Form-Factor (I/O)	M.2 2280		
	Interface	PCIe GEN3X4		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 2400MB/s	Up to 1500MB/s	
	Logical Blocks	2,000,409,264		
	Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]		
	Features	ATA Security, L1.2		
512 GB, M.2 SATA FIPS-140-2 Solid State Drive	Drive Weight	0.022 lb (<10 g)		
	Capacity	512 GB		
	Height	0.09 in (2.3 mm)		
	Width	0.87 in (22 mm)		
	Generation	SM951 NVMe		
	NAND Type	MLC		
	Form-Factor (I/O)	M.2 2280		
	Interface	PCIe GEN3X4		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		Up to 2260MB/s	Up to 1260 MB/s	
	Logical Blocks	500,118,192		

System Technical Specifications

Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
Features	ATA Security, TRIM; L1.2

* For hard drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) disk is reserved for system recovery software.

Technical Specifications – Networking

NETWORKING

<p>Intel® Dual Band Wireless-AC 8265 802.11 AC/a/b/g/n (2x2) WiFi + Bluetooth® 4.2 Combo Adaptor* (vPro)</p>	<p>Wireless LAN Standards</p>	<p>IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11n</p>	
	<p>Interoperability</p>	<p>Wi-Fi certified</p>	
	<p>Frequency Band</p>	<p>802.11b/g/n</p>	<p>2.402 - 2.482 GHz Note: The FCC has declared as of January 1, 2015 products that utilize passive scanning on channel 12/13 and are capable of transmitting must fully comply with requirements of 15.247 or otherwise disable those channels</p>
		<p>802.11a</p>	<p>4.9 - 4.95 GHz (Japan) 5.15 - 5.25 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.825 - 5.850 GHz Note: Indonesia only supports 5.725 - 5.825 GHz (CH149 - CH161)</p>
	<p>Data Rates</p>		<ul style="list-style-type: none"> • 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11b: 1, 2, 5.5, 11 Mbps • 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps • 802.11n: MCS 0 ~ MCS 15, (20MHz, and 40MHz) • 802.11ac : MCS0 ~ MCS9, (1SS, and 2SS) (20MHz, 40MHz, and 80MHz)
	<p>Modulation</p>		<p>Direct Sequence Spread Spectrum CCK, BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</p>
	<p>Security¹</p>		<ul style="list-style-type: none"> • IEEE and Wi-Fi compliant 64 / 128 bit WEP encryption for a/b/g mode only • AES-CCMP: 128 bit in hardware • 802.1x authentication • WPA, WPA2: 802.1x. WPA-PSK, WPA2-PSK, TKIP, and AES. • WPA2 certification • IEEE 802.11i • Cisco Certified Extensions, all versions through CCX4 and CCX Lite • WAPI
	<p>Network Architecture Models</p>		<p>Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)</p>
	<p>Roaming</p>		<p>IEEE 802.11 compliant roaming between band Access Points</p>
	<p>Output Power²</p>		<ul style="list-style-type: none"> • 802.11b : +16dBm minimum • 802.11g : +14dBm minimum • 802.11a : +14dBm minimum • 802.11n HT20(2.4GHz) : +13dBm minimum • 802.11n HT40(2.4GHz) : +13dBm minimum • 802.11n HT20(5GHz) : +12dBm minimum • 802.11n HT40(5GHz) : +12dBm minimum

Technical Specifications – Networking

Power Consumption	Transmit: 2.0 Watts (max) Receive: 1.6 Watts (max) Idle mode (PSP): 180 mW (WLAN Associated) Idle mode: 50 mW (WLAN unassociated) Connect Standby: 10mW (WLAN + BT) Radio disabled: 5 mW
Power Management	ACPI and PCI Express compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	802.11b, 1Mbps : -94dBm maximum 802.11b, 11Mbps : -86dBm maximum 802.11g, 6Mbps : -88dBm maximum 802.11g, 54Mbps : -74dBm maximum 802.11a, 6Mbps : -88dBm maximum 802.11a, 54Mbps : -74dBm maximum 802.11n, MCS07 : -69dBm maximum 802.11n, MCS15 : -66dBm maximum 802.11ac, 1SS, MCS-0 : -86dBm maximum 802.11ac, 1SS, MCS-9 : -61dBm maximum 802.11ac, 2SS, MCS-0 : -83dBm maximum 802.11ac, 2SS, MCS-9 : -58dBm maximum
Antenna Type	High efficiency antenna with spatial diversity, mounted in the display enclosure Two embedded dual band 2.4/5 GHz antennas are provided to the card to support WLAN MIMO and Bluetooth communications
Form Factor	PCI-Express M.2 MiniCard
Dimensions	Type 2230 : 2.3 x 22.0 x 30.0 mm Or Type 1630 : 2.3 x 16.0 x 30.0 mm
Weight	Type 2230 : 2.8g Or Type 1630 : 2g
Operating Voltage	3.3v +/- 9%
Temperature	Operating 14° to 158° F (-10° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating Non-operating 0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)
LED Activity	LED Amber – Radio OFF; LED White – Radio ON

Technical Specifications – Networking

HP Integrated Module with Bluetooth® 4.0/4.1/4.2 Wireless Technology	Bluetooth® Specification	4.0/4.1/4.2 Compliant												
	Frequency Band	2402 to 2480 MHz												
	Number of Available Channels	Legacy: 0~79 (1 MHz/CH) BLE: 0~39 (2 MHz/CH)												
	Data Rates and Throughput	Legacy: 3 Mbps data rate; throughput up to 2.17 Mbps BLE: 1 Mbps data rate; throughput up to 0.2 Mbps Legacy: Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Legacy: Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric (3-DH5) or 864 kbps symmetric (3-EV5)												
	Transmit Power	The Bluetooth component shall operate as a Class II Bluetooth device with a maximum transmit power of +4 dBm for BR and EDR												
	Receiver Sensitivity	<table border="1"> <thead> <tr> <th>Modulation</th> <th>0.01% BER</th> <th>0.001% BER</th> </tr> </thead> <tbody> <tr> <td>GFSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>$\pi/4$-DQPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> <tr> <td>8DPSK</td> <td>-80 dBm</td> <td>-70 dBm</td> </tr> </tbody> </table>	Modulation	0.01% BER	0.001% BER	GFSK	-80 dBm	-70 dBm	$\pi/4$ -DQPSK	-80 dBm	-70 dBm	8DPSK	-80 dBm	-70 dBm
Modulation	0.01% BER	0.001% BER												
GFSK	-80 dBm	-70 dBm												
$\pi/4$ -DQPSK	-80 dBm	-70 dBm												
8DPSK	-80 dBm	-70 dBm												
	Power Consumption	Peak (Tx) 330 mW Peak (Rx) 230 mW Selective Suspend 17 mW												
	Antenna	Internally integrated within module												
	Range	Legacy Up to 33 ft (10 m) BLE Up to 99 ft (30 m)												
	Electrical Interface	USB 2.0 compliant												
	Bluetooth® Software Supported	Microsoft Windows Bluetooth Software												
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves												
	Security	Full support of Bluetooth Security Provisions												
	Power Management	Microsoft Windows ACPI, and USB Bus Support												
	Certifications	Self-configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff												
	Security	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249												
	Power management certifications	ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark												
	Certifications	Serial Port Profile (SPP)1												
	Bluetooth® Profiles Supported	Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN)1,2 Generic Object Exchange Profile (GOEP)1,2 Object Push Profile (OPP)1,2 Hard Copy Cable Replacement (HCRP)1,2 Personal Area Networking Profile (PAN)1,2 Human Interface Device Profile (HID)1,2 Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP) Audio Video Remote Control Profile (AVRCP)												

Technical Specifications – Networking

Bluetooth® V4.1/V4.2 support feature V4.1: ESR5/6/7 compliant
V4.2: ESR8 compliant, LE Secure Connection – Basic.

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

NXP NPC100 Near Field Communication (NFC) Module	Dimensions (L x W x H)	Module 25 mm by 10 mm by 2.0 mm	
	Chipset	NPC100	
	System interface	I ² C	
	NFC RF standards	ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 ISO/IEC 18092 ECMA-340 NFCIP-1 Target and Initiator ECMA-320 NFCIP-2	
	NFC Forum Support Reader (PCD-VCD) Mode¹	Tag Type 1, Type 2, Type3 and Type 4, NFCIP-1 and NFCIP-2 ISO/IEC 14443 A ISO/IEC 14443 B ISO/IEC 15693 MIFARE 1K MIFARE 4K MIFARE DESFire FeliCa Jewel and Topaz cards	
	Card Emulation (PICC-VICC) Mode¹	ISO/IEC 14443 A ISO/IEC 14443 B and B' MIFARE FeliCa	
	Frequency	13.56 MHz	
	NFC Modes Supported	Reader/Writer, Peer-to-Peer	
	Raw RF Data Rates	106, 212, 424, 848 kbps	
	Operating temperature	0°C to 70°C	
	Storage temperature	-20°C to 125°C	
	Humidity	10-90% operating 5-95% non-operating	
	Supply Operating voltage	2.97 to 5.5 Volts	
I/O Voltage	1.8V or 3.3V		
Power Consumption (Booster enable, VBAT= 3.3V, VCC_BOOST = 5V)	Mode Polling Detected Test Tag Type 1	Power Consumption, Typical² 7.3 mA Total 283.8 mA Net Module 236.8 mA	

Technical Specifications – Networking

	Detected Test Tag Type 2	Total 288.8 mA Net Module 241.8 mA
	Detected Test Tag Type 3	Total 287.7 mA Net Module 240.7 mA
	Detected Test Tag Type 4	Total 282.3 mA Net Module 235.3 mA
Antenna	Antenna connector, 0.5mm pitch, 7 connector FPC. Antenna matching is external to module.	
Notes	<ol style="list-style-type: none">1. With application or UICC support2. Actual Power Consumption is dependent on NFC antenna and matching circuit and on the particular polling sequence and period configured.	

Technical Specifications – Security

SECURITY

HP Fingerprint Reader	Mobile Voltage Operation	3.0V-3.6V Single Supply
	Operating Temperature	14° - 167°F (-10° - 75°C)
	Current consumption image	36mA
	Low latency wait for finger	950 uA
	Capture rate	3000 lines/sec
	ESD Resistance	IEC 6100-4-2 4B (+/-15KV)
	Detection Matrix	200*1 (plus another secondary line); 508 dpi, sensor area 12*3 mm

Technical Specifications – Audio/Multimedia

AUDIO/MULTIMEDIA – BANG & OLUFSEN

Hardware	Implementation	Conexant CX7700
	Function Key	Volume up, volume down, and mute
	Volume Controls	
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual digital microphone array when equipped with optional webcam
<hr/>		
Audio Output Quality	Frequency Response	20 Hz - 20 kHz
	Signal to Noise Ratio	106dB (DAC), 102dB (ADC)
	Total Harmonic Distortion	91dB THD+n on LineOut/HP (0.003%)
	Noise Floor	-110 dB
	Play Sampling Rate(s)	Up to 192kHz
	Record Sampling Rate(s)	Up to 96kHz
	DAC	16, 20 or 24-bit
	ADC	16,20 or 24-bit
<hr/>		
Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Technical Specifications – HP Pen technology

HP PEN TECHNOLOGY

HP ZBook x2 Pen	Key Features		
		Precision	The pen has a 1.6mm tip size (0.063inch), ensuring pinpoint accuracy.
		Stylus Ergonomic design	Ergonomic stylus design for professional users. Well balanced weight distribution and customized latex-free silicone rubber for comfortable grip.
		One Control Button	One customized side button for users to customize desired application specific function.
		Battery free	pen leverages battery-less technology
		Pressure sensitivity	4096 levels pressure sensitivity to make sure stylus can capture any tiny stroke difference.
		Hovering capability	The on-screen pen cursor can be controlled by hovering the pen above the screen's surface – no physical contact is necessary.
		Report Rate	200 Hz pen report rate to minimize inking latency or lag.
		Tail Eraser	Intuitive tail eraser design for users to eraser items with another option.
		Tilt function	Enable tilt stroke support capability for better usability and stylus control.
		Palm rejection	Users can rest the underside of their hand on the screen surface without registering any unintended inputs.
		Replacement kit	Different writing feel pen tips (POM & Felt pen tips) are offered for users to choose their preferable inking experience.
	Physical specifications	Pen Technology	Wacom Electro-Magnetic Resonance (EMR)
		Dimension	163.04mm x 11mm
		Weight	12.3gram
		Power	Battery-free
		System Requirement	Win10
		Tip Diameter	1.6mm
		Pressure Sensitivity	4096 pressure level
		Pen Resolution	2540 ppi
		Hover Capability (Y/N)	Yes
		Hover Height (mm)	10mm+
		Report Rate	200 Hz
		Tilt Support (Y/N)	Yes
		Tail Eraser (Y/N)	Yes
		Palm Rejection (Y/N)	Yes
		Pen Tips	10 standard, 4 POM tips and 6 Felt tips for different inking experience
		Environmental conditions	Operating temperature
	Operating humidity		30 - 80 %
	Storage temperature		-10 to 55°C (14° F – 131° F)
	Storage humidity		30 - 80 %

Technical Specifications – Power

POWER

HP 65W EM Smart AC Adapter	Dimensions	127.0x51.0x30.0mm	
	Weight	unit: 350g +/- 10g	
	Input	90 to 265 VAC	
		Input Efficiency	88.0 % at 115 Vac and 89.0 % at 230Vac
		Input frequency range	47 to 63 Hz
		Input AC current	Max. 1.7 A at 90 Vac
	Output	Output power	65W
		DC output	19.5V
		Hold-up time	5ms at 115 Vac input
		Output Over Current Protection	<11.0A
	AC Connector (Ac Inlet)	C6 (3pin/with grounded, with Smart ID DC connector)	
	AC Connector (Ac Inlet)	Operating temperature	32F to 104F (0 to 40C)
	Environmental Design	Non-operating (storage) temperature	-4F to 185F (-20 o 85C)
		Altitude	0 to 16,400 ft (0 to 5000m)
	Humidity	20% to 95%	
	Storage Humidity	10% to 95%	
EMI and Safety Certifications	<p>*CE Mark - full compliance with LVD and EMC directives</p> <p>* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.</p> <p>* MTBF - over 200,000 hours at 25°C ambient condition.</p>		

HP 65W Smart AC Adapter	Dimensions	107.0x47.0x30.0mm	
	Weight	unit: 250g +/- 10g	
	Input	90 to 265 VAC	
		Input Efficiency	88% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	2.9 A at 90 VAC, 1.45 A at 180 VAC
	Output	Output power	200W
		DC output	19.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<16A, Over voltage protection- 29V max automatic shutdown
	AC Connector (Ac Inlet)	C6 (3pin/with grounded, with Smart ID DC connector)	
	AC Connector (Ac Inlet)	Operating temperature	32° to 104° F (0° to 40° C)
	Environmental Design		

Technical Specifications – Power

EMI and Safety Certifications	Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
	Altitude	0 to 10,000 ft (0 to 3,048 m)
	Humidity	20% to 80%
	Storage Humidity	10% to 90%
	*CE Mark - full compliance with LVD and EMC directives	
	* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.	
	* MTBF - over 200,000 hours at 25°C ambient condition.	

HP 90W Smart AC Adapter	Dimensions	107.0x47.0x30.0mm	
	Weight	unit: 250g +/- 10g	
	Input		90 to 265 VAC
		Input Efficiency	88% min at 115 VAC
	Output	Input frequency range	47 to 63 Hz
		Input AC current	2.9 A at 90 VAC, 1.45 A at 180 VAC
		Output power	200W
		DC output	19.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<16A, Over voltage protection- 29V max automatic shutdown
		AC Connector (Ac Inlet)	C6 (3pin/with grounded, with Smart ID DC connector)
	AC Connector (Ac Inlet) Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
Storage Humidity		10% to 90%	
EMI and Safety Certifications	*CE Mark - full compliance with LVD and EMC directives		
	* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.		
	* MTBF - over 200,000 hours at 25°C ambient condition.		

HP Long Life 4-cell Polymer Battery (70 WHr)	Dimensions (H x W x L)	0.29 x 3.35 x 10.2 in (0.74cm x 8.5cm x 25.8cm)
	Weight (max)	315g

Technical Specifications – Power

Cells/Type	4-cell; Prismatic	
Energy	Voltage	15.2V
	Amp-hour capacity	4.21Ah
	Watt-hour capacity	64Wh
Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
	Operating (Discharging)	14° to 140° F (-10° to 60° C)
	Non-operating	-4° to 140° F (-20° to 60° C)
Battery Re-Charge Time	System in OFF or Standby Mode	3 hours
	System ON	3 to 5 hours
Fuel Gauge LED	No	
Warranty*	3 year	

* 3-year platform warranty is required for a 3-year Long Life Battery warranty.

Type	Description	Part #
Cases	HP ZBook x2 Case	Y7B68AA
	HP Executive 15.6 Black Top Load	P6N18AA
	HP Business Case (up to 15.6")	H5M92AA
	HP ZBook x2 Protective Case	Y7B68AA
Docking	HP ZBook 150W Thunderbolt 3 Dock	P5Q58AA
	HP USB-C™ Travel Dock	TOK29AA
	HP USB Travel Dock	TOK30AA
	HP 3005pr USB 3.0 Port Replicator w/ USB-C™ Adapter	Y4H06AA
	HP Display and Notebook Stand II	E8G00AA#xxx
	HP USB-C™ Elite Dock	X7W54AA
	HP USB-C™ Universal Dock	1MK33AA
	HP Elite USB-C™ Dock	Z9R42AA
	HP USB-C™ Mini Dock	1PM64AA
HP ZBook Dock with Thunderbolt 3 (150W)	P5Q58AA	
Pen	HP ZBook x2 Pen	TBD
	HP ZBook x2 Nib Set	TBD
Input/Output - Mice	HP Comfort Grip Mouse	H2L63AA
	HP 3-Button Laser Mouse	H4B81AA#xxx
	HP Ultra Mobile Wireless Mouse	H6F25AA#xxx
	HP X4000 Bluetooth Mouse	H3T50AA#xxx
	HP Slim Bluetooth Mouse	F3J92AA#xxx
	HP Ultrathin Wireless Mouse	L9V78AA
	HP USB Travel Mouse	G1K28AA#xxx
HP Slim Wireless Keyboard and Mouse	T6L04AA#xxx	

Options and Accessories (sold separately and availability may vary by country)

	HP USB Essential Keyboard and Mouse	H6L29AA#xxx
	HP Slim USB Keyboard and Mouse	T6T83AA
	HP Wireless (Link-5) Keyboard	T6U20AA#xxx
	HP ZBook x2 Pen	1VY59AA
Power Adapters	HP 65W Slim A/C Adapter w/USB	H6Y82AA
	HP 90W Slim A/C Adapter w/USB	H6Y83AA
	HP 90W Slim Auto Combo AC Adapter w/USB	H6Y84AA
	HP 65W Smart AC Adapter	H6Y89AA
	HP 90W Smart AC Adapter	H6Y90AA
Adapters	HP ZBook x2 Pen Nibs	1VY60AA
	HP USB-C™ to VGA Adapter	N9K76AA
	HP USB-C™ to USB 3.0	N2Z63AA
	HP USB-C™ to USB Hub	Z6A00AA
	HP USB-C™ to DisplayPort™ Adapter	N9K78AA
	HP USB-C™ to DisplayPort™ Adapter	N9K78AA
	HP HDMI to DVI adapter	F5A28AA
	DisplayPort™ to DVI Adapter	F7W96AA
	DisplayPort™ to VGA	F7W97AA
	DisplayPort™ to HDMI 1.4 Adapter	F3W43AA
Displays	HP DreamColor Z31x Studio Display	Z4Y82A8
Wireless		TBD
Collaboration	HP UC Conferencing Keyboard	K8P74AA#xxx
	HP UC Speaker Phone	K7V16AA
	HP UC Wired Headset	K7V17AA
	HP UC Mono Wireless Headset	W3K08AA
	HP UC Duo Wireless Headset	W3K09AA
	HP Stereo 3.5mm Headset	T1A66AA
	HP Stereo USB Headset	T1A67AA
Storage - External Storage	HP External USB DVDRW Drive	F2B56AA
Security	HP Nano Keyed Cable Lock	1AJ39AA

Options and Accessories (sold separately and availability may vary by country)

	HP Dual Head Cable Lock (Non-Master key)	T1A64AA
	HP Dual Head Cable Lock (Master Key)	T1A65AA
	HP Docking Station Cable Lock	AU656AA#XXX
	HP Essential Combination Lock	TOY16AA
	HP Combination Lock	TOY15AA
	HP Keyed Cable Lock	TOY14AA
	HP 14" Privacy Filter designed by 3M	V8Z57AA
	HP 14" Touchable Privacy Filter	3KP52AA
Care Packs	(for 1 year platforms)	UC282E
	(for 3 year platforms)	UC279E

NOTE: External power supplies, power cords, cables and peripherals are not low halogen. Service parts obtained after purchase may not be low halogen.

Summary of Changes

Date of change:	Version History:		Description of change:
October 23, 2017	From v1 to v2	Changed	At A Glance section
January 30, 2018	From v2 to v3	Added	HP Nano Keyed Cable Lock to Options and Accessories section
		Changed	ENVIRONMENTAL DATA section
February 28, 2018	From v3 to v4	Added	Dock, case, mouse, adapter, display and care packs added to options section
		Added	Note to Power section
November 19, 2018	From v4 to v5	Added	HP 14" Privacy Filter designed by 3M and HP 14" Touchable Privacy Filter

Copyright © 2018 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core, and Celeron and Thunderbolt are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of its proprietor used by HP Inc. under license. Inc. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation in the United States and/or other countries. NVIDIA, the NVIDIA logo, Optimus and Quadro are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. SD, SDHC, and SDXC are trademarks or registered trademarks of SD-3C in the United States, other countries or both. USB Type-C and USB-C are trademarks of USB Implementers Forum. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. ENERGY STAR® is a registered trademark mark of the U.S. Environmental Protection Agency.