


Precision 7960 Tower

Technical Guidebook

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Views of Precision 7960 Tower	5
Display.....	5
Back.....	6
System-board call outs.....	7
Chapter 2: Specifications of Precision 7960 Tower	10
Dimensions and weight.....	10
Processor.....	10
Chipset.....	11
Operating system.....	11
Memory.....	11
Memory matrix.....	12
External ports.....	13
Internal slots.....	13
Ethernet.....	14
Wireless module.....	14
Audio.....	14
Storage.....	15
Storage matrix.....	16
RAID (Redundant Array of Independent Disks).....	17
Media-card reader.....	18
Power ratings.....	18
Power cord.....	19
Power supply connector.....	21
GPU—Discrete.....	21
Video port resolution.....	21
Hardware security.....	22
Environmental.....	22
Regulatory compliance.....	23
Operating and storage environment.....	23
Chapter 3: Engineering specifications	24
Physical system dimensions.....	24
Add-in card dimensions.....	24
Slot limitations.....	24
PCIe add-in cards.....	25
Serial PCIe add-in card.....	25
UltraSpeed Duo M.2 PCIe card.....	26
UltraSpeed Quad M.2 PCIe card.....	26
Thunderbolt 4 PCIe add-in card.....	27
Ethernet.....	28
Intel Ethernet Connection i219-LM.....	28
Marvell AQC113CS/AQC113.....	29
Wireless module.....	30


Qualcomm WCN6856, 2x2, Wi-Fi 6E DBS, Bluetooth 5.3.....	30
GPU—Discrete.....	31
NVIDIA RTX A6000, 48 GB GDDR6.....	31
NVIDIA RTX A5500, 24 GB GDDR6.....	32
NVIDIA RTX A4500, 20 GB GDDR6.....	33
NVIDIA RTX A4000, 16 GB GDDR6.....	33
NVIDIA RTX A2000, 12 GB GDDR6.....	34
NVIDIA T1000, 8 GB GDDR6.....	35
NVIDIA T400, 4 GB GDDR6.....	35
AMD Radeon Pro W6800, 32 GB GDDR6.....	36
AMD Radeon Pro W6600, 8 GB GDDR6.....	36
GPU and PSU matrix.....	37
Storage.....	38
2.5-inch, 500 GB, 7200 RPM, SATA, HDD	38
3.5-inch, 1 TB, 7200 RPM, SATA, HDD	38
M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD.....	39
M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	40
M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	40
M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	41
2.5-inch, 600 GB, 15000 RPM, SAS, Enterprise HDD	41
2.5-inch, 1.2 TB, 10000 RPM, SAS, Enterprise HDD	42
2.5-inch, 2.4 TB, 10000 RPM, SAS, Enterprise HDD	42
3.5-inch, 2 TB, 7200 RPM, SATA, HDD	43
3.5-inch, 4 TB, 7200 RPM, SATA, HDD	44
3.5-inch, 8 TB, 7200 RPM, SATA, HDD	44
3.5-inch, 12 TB, 7200 RPM, SATA, HDD	45
2.5-inch, 1.92 TB, MU, SATA, SSD.....	45
Media-card reader	46
Power ratings.....	47
Thermal dissipation.....	48
CMOS battery.....	48
Accessories.....	48
Security.....	48
Software security.....	48
Trusted Platform Module.....	49
Acoustic noise emission information tower.....	49
Chassis enclosure and ventilation requirements.....	50
System management features.....	50
Dell Client Command Suite for In-Band systems management	50
Out of Band Systems Management.....	51

Chapter 4: Dell Optimizer..... 52

Chapter 5: Getting help and contacting Dell..... 53


Views of Precision 7960 Tower

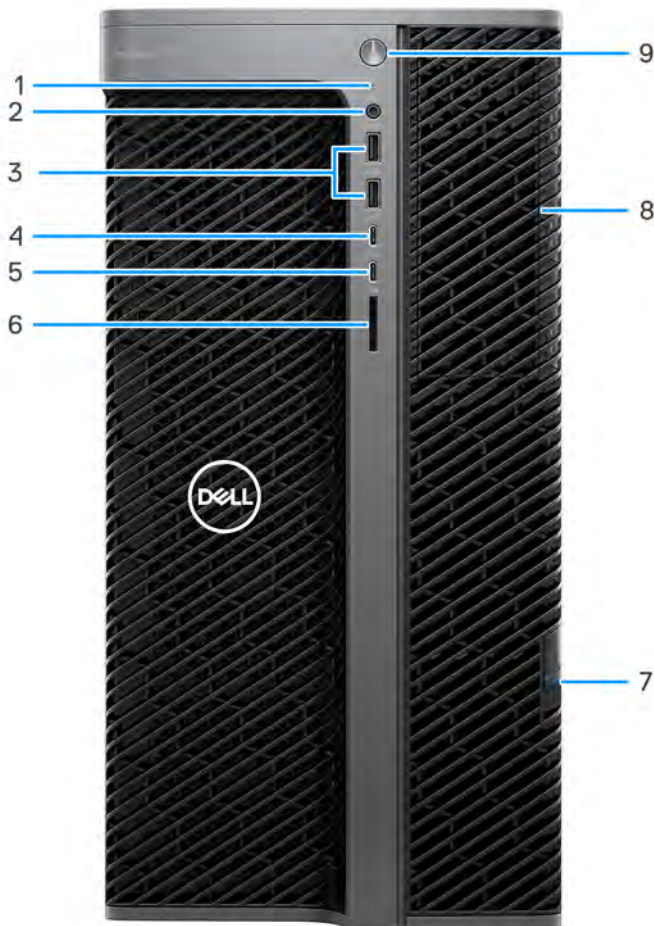Display



1. Hard-drive activity indicator
2. Universal audio port
3. USB 3.2 Gen 1 ports
4. USB 3.2 Gen 2x2 Type-C port with PowerShare
5. USB 3.2 Gen 2 Type-C port
6. SD-card slot
7. SATA/SAS/NVMe drive flexbays
8. Optical drive slots
9. Power button

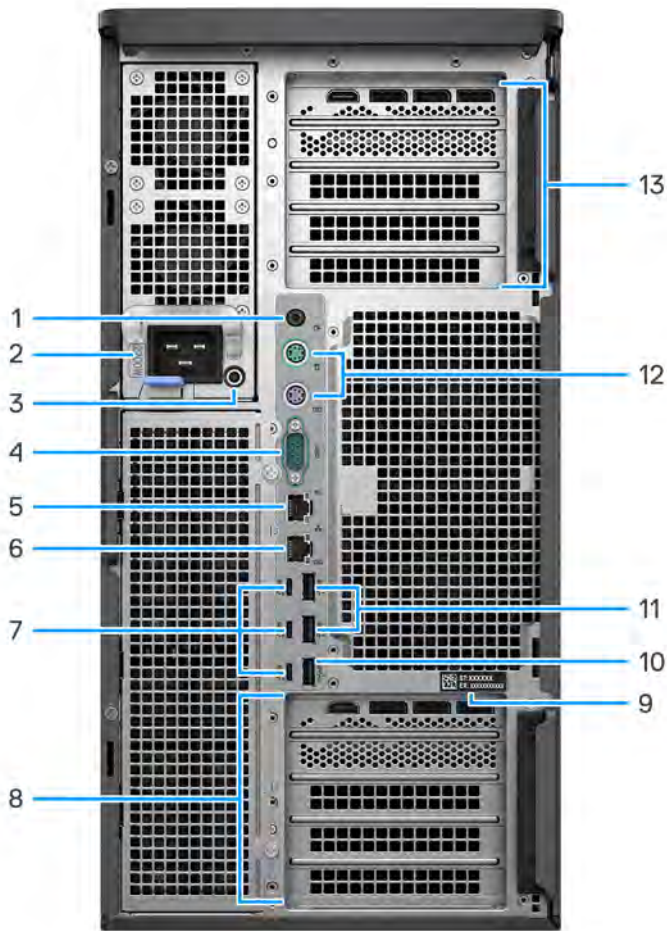Back



1. Line-out port
2. Power adapter port
3. PSU BIST button
4. Serial port
5. RJ45 Ethernet port, 1 GbE
6. RJ45 Ethernet port, 10 GbE
7. USB 3.2 Gen 2 Type-C ports
8. Expansion card slots
9. Service tag
10. USB 3.2 Gen 1 port with Smart Power On
11. USB 3.2 Gen 1 ports
12. PS2 ports (for keyboard and mouse)
13. Expansion card slots

System-board call outs

This topics provides detailed call outs for the connectors on the system board:

System-board call outs (front side)

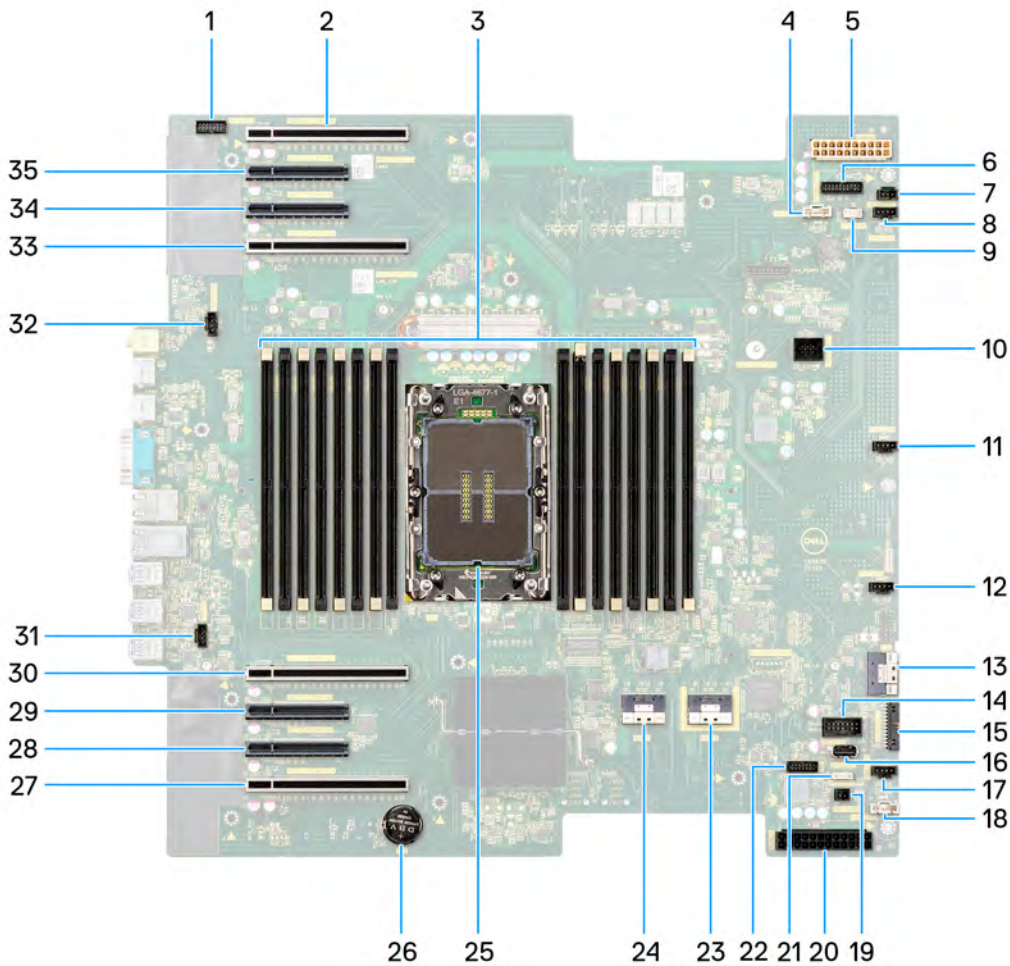


Table 1. Precision 7960 tower system board callouts (front side)

No	Connector	Description
1	FP AUDIO	Front panel audio-cable connector
2	SLOT8	PCI Express Gen 4 x16 slot
3	DIMMx16 (DIMM1—DIMM16)	Memory module connectors
4	FAN SYS4	System fan connector
5	POWER2	Power cable connector
6	POWER CRTL	Power controller switch connector
7	INTRUSION	Intrusion switch connector
8	FAN SYS3	System fan connector
9	INT SPKR	Internal-speaker connector
10	DDR FAN 0/1	Memory-module fan connector

Table 1. Precision 7960 tower system board callouts (front side) (continued)

No	Connector	Description
11	FAN SYS2	System fan connector
12	FAN SYS1	System fan connector
13	FIO	Front I/O-daughter board connector
14	INT USB1	Internal USB 2.0
15	FRONTPANEL	Front I/O-power connector
16	INT USB2	Internal USB 2.0
17	FAN SYS0	System fan connector
18	FAN SYS5	System fan connector
19	PWR REMOTE	System fan connector
20	POWER1	Intel Virtual RAID on CPU
21	PWR REMOTE	System fan connector
22	TBT	Thunderbolt add-in card connector
23	REAR NVME2-3	Rear NVMe connector for externally facing M.2 flexbay drive
24	REAR NVME0-1	Rear NVMe connector for externally facing M.2 flexbay drive
25	CPU	Processor socket
26	RTC	Coin-cell battery
27	SLOT4	PCI Express Gen 4 x16 slot
28	SLOT3	PCI Express Gen 4 x8 slot wired as x4 electrically
29	SLOT2	PCI Express Gen 4 x8 slot wired as x4 electrically
30	SLOT1	PCI Express Gen 5 x16 slot
31	FAN REAR0	Rear Fan 0
32	FAN REAR1	Rear Fan 1
33	SLOT5	PCI Express Gen 5 x16 slot
34	SLOT6	PCI Express Gen 4 x8 slot
35	SLOT7	PCI Express Gen 4 x8 slot

System-board call outs (rear side)

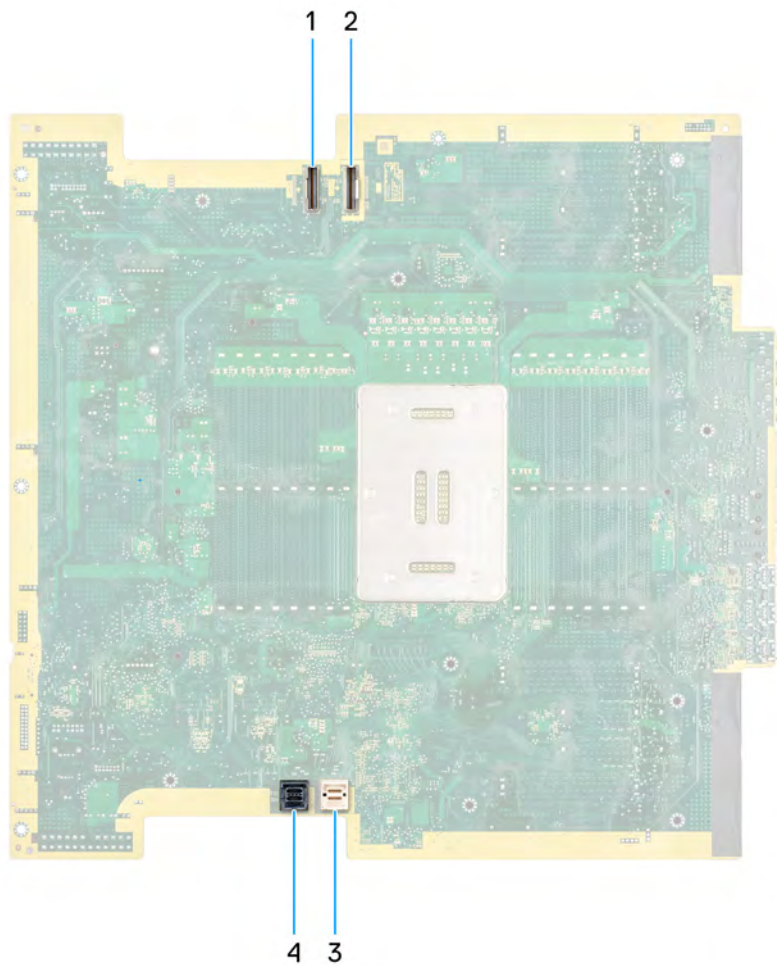


Table 2. Precision 7960 tower system board callouts (rear side)


No	Connector	Description
1	Front NVME0-1 (rear access)	Front NVMe connector for externally facing M.2 flexbay drive
2	Front NVME2-3 (rear access)	Front NVMe connector for externally facing M.2 flexbay drive
3	SATA 4-7 (rear access)	SATA hard drive data-cable connector
4	SATA 0-3 (rear access)	SATA hard drive data-cable connector

Specifications of Precision 7960 Tower

Dimensions and weight

The following table lists the height, width, depth, and weight of your Precision 7960 Tower.

Table 3. Dimensions and weight

Description	Values
Height	430.70 mm (16.96 in.) / 434.20 mm (17.09 in.) with rubber feet
Width	218.00 mm (8.58 in.)
Depth	538.30 mm (21.19 in.) / 569.15 mm (22.41 in.) with lock structure
Weight  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	<ul style="list-style-type: none"> • 37.56 kg (82.82 lbs.) — maximum • 23.81 kg (52.50 lbs.)— typical • 21.04 kg (46.39 lbs.)— minimum

Processor

The following table lists the details of the processors that are supported by your Precision 7960 Tower .

Table 4. Processor

Description	Option one	Option two	Option three	Option four	Option five	Option six	Option seven	Option eight	Option nine
Processor type	Intel Xeon W5-3423	Intel Xeon W5-3425	Intel Xeon W5-3433	Intel Xeon W5-3435 X	Intel Xeon W7-3445	Intel Xeon W7-3455	Intel Xeon W7-3465X	Intel Xeon W9-3475X	Intel Xeon W9-3495X
Processor wattage	220 W	270 W	220 W	270 W	270 W	270 W	300 W	300 W	350 W
Processor core count	12	12	16	16	20	24	28	36	56
Processor thread count	24	24	32	32	40	48	56	72	112
Processor speed	2.10 GHz to 4.20 GHz	3.20 GHz to 4.60 GHz	2.0 GHz to 4.20 GHz	3.10 GHz to 4.70 GHz	2.60 GHz to 4.80 GHz	2.50 GHz to 4.80 GHz	2.50 GHz to 4.80 GHz	2.20 GHz to 4.80 GHz	1.90 GHz to 4.80 GHz
Processor cache	30 MB	30 MB	45 MB	45 MB	52.5 MB	67.5 MB	75 MB	82.5 MB	105 MB
Integrated graphics	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported

Chipset

The following table lists the details of the chipset supported by your Precision 7960 Tower.

Table 5. Chipset

Description	Values
Chipset	Intel W790
Processor	Intel Xeon W5/W7/W9 processors
DRAM bus width	<ul style="list-style-type: none">64-bit (for single-channel)128-bit (for dual-channel)
Flash EPROM	<ul style="list-style-type: none">16 MB (nRPMC)32 MB (RPMC)
PCIe bus	Up to Gen5
Non-volatile memory	Yes
BIOS configuration Serial Peripheral Interface (SPI)	256 Mbit (32 MB) located at SPI_FLASH
Trusted Platform Module (TPM) 2.0 (Discrete TPM Enabled)	24 KB located at TPM 2.0 on chipset
Firmware-TPM (Discrete TPM disabled)	By default the Platform Trust Technology feature is visible to the operating system.
NIC EEPROM	LOM configuration contained within SPI flash ROM instead of LOM e-fuse

Operating system

Your Precision 7960 Tower supports the following operating systems:

- Windows 11 Pro for Workstations
- Windows 11 Pro for Workstations Downgrade (Windows 10 Pro for Workstations Image-factory installed)
- Windows 10 CMIT Government Edition, 64-bit (China only)
- Ubuntu 22.04 LTS, 64-bit
- Red Hat Enterprise Linux 8.6

Memory

The following table lists the memory specifications of your Precision 7960 Tower.

Table 6. Memory specifications

Description	Values
Memory slots	16 DIMMS
Memory type	DDR5
Memory speed	4800 MHz
Maximum memory configuration	1 TB
Minimum memory configuration	16 GB

Table 6. Memory specifications (continued)

Description	Values
Memory size per slot	16 GB, 32 GB, 64 GB
Memory configurations supported	<ul style="list-style-type: none"> ● 16 GB, 1 x 16 GB, DDR5, 4800 MHz, ECC ● 32 GB, 1 x 32 GB, DDR5, 4800 MHz, ECC ● 32 GB, 2 x 16 GB, DDR5, 4800 MHz, ECC ● 64 GB, 1 x 64 GB, DDR5, 4800 MHz, ECC ● 64 GB, 2 x 32 GB, DDR5, 4800 MHz, ECC ● 64 GB, 4 x 16 GB, DDR5, 4800 MHz, ECC ● 96 GB, 6 x 16 GB, DDR5, 4800 MHz, ECC ● 128 GB, 2 x 64 GB, DDR5, 4800 MHz, ECC ● 128 GB, 4 x 32 GB, DDR5, 4800 MHz, ECC ● 128 GB, 8 x 16 GB, DDR5, 4800 MHz, ECC ● 192 GB, 6 x 32 GB, DDR5, 4800 MHz, ECC ● 192 GB, 12 x 16 GB, DDR5, 4800 MHz, ECC ● 256 GB, 4 x 64 GB, DDR5, 4800 MHz, ECC ● 256 GB, 16 x 16 GB, DDR5, 4800 MHz, ECC ● 384 GB, 6 x 64 GB, DDR5, 4800 MHz, ECC ● 384 GB, 12 x 32 GB, DDR5, 4800 MHz, ECC ● 512 GB, 8 x 64 GB, DDR5, 4800 MHz, ECC ● 512 GB, 16 x 32 GB, DDR5, 4800 MHz, ECC ● 768 GB, 12 x 64 GB, DDR5, 4800 MHz, ECC ● 1 TB, 16 x 64 GB, DDR5, 4800 MHz, ECC

Memory matrix

The following table lists the memory configurations supported on your Precision 7960 Tower.

NOTE: Ensure that you install the memory module starting from DIMM 1 slot.

Table 7. Memory matrix

Configurations	DIM M 8	DIM M 16	DIM M 2	DIM M 10	DIM M 6	DIM M 14	DIM M 4	DIM M 12	DIM M 9	DIM M 1	DIM M 15	DIM M 7	DIM M 11	DIM M 3	DIM M 13	DIM M 5
16 GB DDR5	-	-	-	-	-	-	-	-	-	16	-	-	-	-	-	-
32 GB DDR5	-	-	-	-	-	-	-	-	-	32	-	-	-	-	-	-
32 GB DDR5	-	-	16	-	-	-	-	-	-	16	-	-	-	-	-	-
64 GB DDR5	-	-	-	-	-	-	-	-	-	64	-	-	-	-	-	-
64 GB DDR5	-	-	32	-	-	-	-	-	-	32	-	-	-	-	-	-
64 GB DDR5	-	-	16	-	-	-	16	-	-	16	-	-	-	16	-	-
96 GB DDR5	-	-	16	-	16	-	16	-	-	16	-	-	-	16	-	16
128 GB DDR5	16	-	16	-	16	-	16	-	-	16	-	16	-	16	-	16
128 GB DDR5	-	-	32	-	-	-	32	-	-	32	-	-	-	32	-	-
128 GB DDR5	-	-	64	-	-	-	-	-	-	64	-	-	-	-	-	-
192 GB DDR5	16	-	16	16	16	-	16	16	16	16	-	16	16	16	-	16
192 GB DDR5	-	-	32	-	32	-	32	-	-	32	-	-	-	32	-	32
256 GB DDR5	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
256 GB DDR5	-	-	64	-	-	-	64	-	-	64	-	-	-	64	-	-

Table 7. Memory matrix (continued)

384 GB DDR5	32	-	32	32	32	-	32	32	32	32	-	32	32	32	-	32
384 GB DDR5	-	-	64	-	64	-	64	-	-	64	-	-	-	64	-	64
512 GB DDR5	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32
512 GB DDR5	64	-	64	-	64	-	64	-	-	64	-	64	-	64	-	64
768 GB DDR5	64	-	64	64	64	-	64	64	64	64	-	64	64	64	-	64
1 TB DDR5	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64

External ports

The following table lists the external ports of your Precision 7960 Tower.

Table 8. External ports

Description	Values
Network port	<ul style="list-style-type: none"> One RJ45 Ethernet port, 1 GbE One RJ45 Ethernet port, 10 GbE
USB ports	<p>Front:</p> <ul style="list-style-type: none"> Two USB 3.2 Gen 1 ports One USB 3.2 Gen 2x2 Type-C port with PowerShare One USB 3.2 Gen 2 Type-C port <p>Rear:</p> <ul style="list-style-type: none"> Three USB 3.2 Gen 2 Type-C ports Two USB 3.2 Gen 1 ports One USB 3.2 Gen 1 port with Smart Power On
Audio port	<ul style="list-style-type: none"> One universal audio jack One Line-out port
Video port	Not supported
Media-card reader	Not supported
Power-adaptor port	Not supported
Security-cable slot	<ul style="list-style-type: none"> One kensington security-cable slot One padlock ring

Internal slots

The following table lists the internal slots of your Precision 7960 Tower.

Table 9. Internal slots

Description	Values
Expansion	<ul style="list-style-type: none"> Two full-height Gen5 PCIe x16 slots Two full-height Gen4 PCIe x16 slots Two full-height Gen4 PCIe x8 slots Two full-height, half-length Gen4 PCIe x8 slots wired as x4 electrically
mSATA	NA

Table 9. Internal slots (continued)

Description	Values
SATA/SAS/NVMe	<ul style="list-style-type: none"> • Eight externally facing (four front and four rear) storage flexbays with optical drive configuration • Ten externally facing (six front and four rear) storage flexbays without optical drive configuration • Up to 8 M.2 NVMe drives (four front and four rear)
M.2	NA

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Precision 7960 Tower.

Table 10. Ethernet specifications

Description	Option 1	Option 2
Model number	Intel i219-LM	Marvell AQC113
Transfer rate	10/100/1000 Mbps	10/100/1000/10000 Mbps

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module supported on your Precision 7960 Tower.

Table 11. Wireless module specifications

Description	Values
Model number	Qualcomm WCN6856-DBS
Transfer rate	Up to 3571 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz
Wireless standards	<ul style="list-style-type: none"> • WiFi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6E (WiFi 802.11ax)
Encryption	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth	Bluetooth 5.3

Audio

The following table lists the audio specifications of your Precision 7960 Tower.

Table 12. Audio specifications

Description	Values
Audio controller	Realtek ALC3246-CGT

Table 12. Audio specifications (continued)

Description		Values
Stereo conversion		Supported (Front panel single universal audio jack)
Internal audio interface		High definition audio interface
External audio interface		Line-out (re-taskable)
Number of speakers		One
Internal-speaker amplifier		Supported
External volume controls		No hardware volume buttons
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	2.5 W
Subwoofer output		Not applicable
Microphone		Not applicable

Storage

This section lists the storage options on your Precision 7960 Tower.

Table 13. Storage specifications

Storage type	Interface type	Capacity
2.5-inch, 7200 RPM, HDD	SATA 3.0	500 GB
3.5-inch, 7200 RPM, HDD	SATA 3.0	1 TB
M.2 2280, Class 40 SSD	PCIe NVMe Gen4 x4	Up to 4 TB
2.5-inch, 10000 RPM, SAS, Enterprise HDD	SATA 3.0	Up to 2.4 TB
2.5-inch, 15000 RPM, SAS, Enterprise HDD	SATA 3.0	600 GB
3.5-inch, 7200 RPM, SAS, Enterprise HDD	SATA 3.0	Up to 12 TB
2.5-inch, MU, SATA, SSD	SATA	1.92 TB

Storage matrix

The following table lists the storage configurations supported on your Precision 7960 Tower.

Table 14. Storage matrix

Storage description	Flex 0		Flex 1		Flex 2		Flex 3		Flex 4		Zoom
	HDD0	HDD1	HDD2	HDD3	HDD4	HDD5	Rear HDD0	Rear HDD1	Rear HDD2	Rear HDD3	
Flex PCIe Non-RAID Boot (Intel)	PCIe	PCIe	PCIe	PCIe		ODD/NA	PCIe	PCIe	PCIe	PCIe	N
Flex PCIe Non-RAID Boot (Intel) + SATA (Intel) - 4 pcs PCIe	PCIe	PCIe	PCIe	PCIe		ODD/NA SATA	SATA/ SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS	N
Flex PCIe Non-RAID Boot (Intel) + SATA (Intel) - 2 pcs PCIe	SATA	SATA	PCIe	PCIe		NA	SATA/ SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS	N
Flex PCIe Non-RAID Boot (Intel) + SATA/SAS	PCIe	PCIe	PCIe	PCIe		ODD/NA SATA/SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS	N
Flex PCIe Non-RAID Boot	PCIe	PCIe	PCIe	PCIe		ODD/NA	NA				N
Flex PCIe RAID Boot	PCIe	PCIe	PCIe	PCIe		ODD/NA	NA				N
Zoom Boot JBOD + SATA (Intel)	SATA	SATA	SATA	SATA		ODD/NA	SATA	SATA	SATA	SATA	Y
Zoom Boot JBOD + SATA/SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS		ODD/NA SATA/SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS	SATA/ SAS	Y

Zoom	SSD location			
Description	SSD0	SSD1	SSD2	SSD3
Zoom2 Non-RAID	Yes	No	No	No
Zoom2 Non-RAID	Yes	Yes	No	No
Zoom4 Non-RAID	Yes	No	No	No
Zoom4 Non-RAID	Yes	Yes	No	No
Zoom4 Non-RAID	Yes	Yes	Yes	No
Zoom4 Non-RAID	Yes	Yes	Yes	Yes

Zoom Boot	SSD location			
Description	SSD0	SSD1	SSD2	SSD3

Zoom Boot	SSD location			
Zoom2 Non-RAID Boot	Yes (Boot)	No	No	No
Zoom2 Non-RAID Boot	Yes (Boot)	Yes	No	No
Zoom4 Non-RAID Boot	Yes (Boot)	No	No	No
Zoom4 Non-RAID Boot	Yes (Boot)	Yes	No	No
Zoom4 Non-RAID Boot	Yes (Boot)	Yes	Yes	No
Zoom4 Non-RAID Boot	Yes (Boot)	Yes	Yes	Yes

RAID (Redundant Array of Independent Disks)

For optimal performance when configuring drives as a RAID volume, Dell recommends drive models that are identical.

NOTE: RAID is not supported on Intel Optane configurations.

RAID 0 (Striped, Performance) volumes benefit from higher performance when drives are matched because the data is split across multiple drives: any IO operations with block sizes larger than the stripe size will split the IO and become constrained by the slowest of the drives. For RAID 0 IO operations where block sizes are smaller than the stripe size, whichever drive the IO operation targets will determine the performance, which increases variability and results in inconsistent latencies. This variability is particularly pronounced for write operations and it can be problematic for applications that are latency sensitive. One such example of this is any application that performs thousands of random writes per second in very small block sizes.

RAID 1 (Mirrored, Data Protection) volumes benefit from higher performance when drives are matched because the data is mirrored across multiple drives: all IO operations must be performed identically to both drives, thus variations in drive performance when the models are different, results in the IO operations completing only as fast as the slowest drive. While this does not suffer the variable latency issue in small random IO operations as with RAID 0 across heterogeneous drives, the impact is nonetheless large because the higher performing drive becomes limited in all IO types. One of the worst examples of constrained performance here is when using unbuffered IO. To ensure writes are fully committed to non-volatile regions of the RAID volume, unbuffered IO bypasses cache (for example by using the Force Unit Access bit in the NVMe protocol) and the IO operation will not complete until all the drives in the RAID volume have completed the request to commit the data. This kind of IO operation completely negates any advantage of a higher performing drive in the volume.

RAID 5 provides better performance by using data striping and protection through parity. The disadvantage of RAID 5 is that rebuilding a large RAID 5 volume requires a longer period of time. The following are the key features of RAID 5:

- Requires at least three drives.
- Data is available even if one of the drives present in the volume fails. The failed drive must be replaced, and the volume must be rebuilt for the data to be accessible.
- The total capacity is N-1, where N is the total capacity of the drives in the array. For example, if you use three 1 TB drives in a RAID 5 array, the total volume size is 2 TB.

RAID 10 is a stripe of mirrors that combines the features of RAID 0 and RAID 1. As the blocks are striped and mirrored, the performance and redundancy are higher. The disadvantage of RAID 10 is that it is more expensive than other RAID levels, with a higher number of drives required. The following are the key features of RAID 10:

- Requires a minimum of four drives. Only an even number of drives can be used, and an odd number of drives are not possible.
- The total volume capacity is half the sum of individual drives capacity. For example, when you use four drives of 1 TB, you get a RAID 10 volume of 2 TB.

Care must be taken to match not only the drive vendor, capacity, and class, but also the specific model. Drives from the same vendor, with the same capacity, and even within the same class, can have very different performance characteristics for certain types of IO operations. Thus, matching by model ensures that the RAID volumes is comprised of an homogeneous array of drives that will deliver all the benefits of a RAID volume without incurring the additional penalties when one or more drives in the volume are lower performing.

Precision 7960 Tower supports RAID with more than one hard drive configuration.

Media-card reader

The following table lists the media cards supported by your Precision 7960 Tower.

Table 15. Media-card reader specifications

Description	Values
Media-card type	One SD card slot
Media-cards supported	<ul style="list-style-type: none"> Secure Digital (SD) Secure Digital High Capacity (SDHC) Secure Digital Extended Capacity (SDXC)
<p>NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.</p>	

Power ratings

The following table lists the power rating specifications of Precision 7960 Tower.

Table 16. Power ratings

Description	Option one	Option two
Type	1100 W/1400 W Gold internal power supply unit	1500 W/2200 W Platinum internal power supply unit
PSU dimension		
Height	63 mm (2.48 in.)	63 mm (2.48 in.)
Width	160 mm (6.29 in.)	160 mm (6.29 in.)
Depth	225 mm (8.85 in.)	225 mm (8.85 in.)
Input voltage	90 Vac - 264 Vac	90 Vac - 264 Vac
Input frequency	47 Hz - 63 Hz	47 Hz - 63 Hz
Input current (maximum)	15 A	16 A
Output current (continuous)	90 Vac~180 Vac (1100 W) <ul style="list-style-type: none"> 12 VDC/91.6 A -12 VDC/0.5 A 12 VSBDC/8 A 180.1 Vac~264 Vac (1400 W) <ul style="list-style-type: none"> 12 V/116.7 A -12 VDC/0.5 A 12 VSBDC/8 A 	90 Vac~114.9 Vac (1200 W) <ul style="list-style-type: none"> 12 VDC/98.37 A -12 VDC/0.5 A 12 VSBDC/8 A 115 Vac~179.9 Vac (1500 W) <ul style="list-style-type: none"> 12 V/122.96 A -12 VDC/0.5 A 12 VSBDC/8 A 180 Vac~264 Vac (2200 W) <ul style="list-style-type: none"> 12 VDC/180.33 A -12 VDC/0.5 A 12 VSBDC/8 A
Rated output voltage	<ul style="list-style-type: none"> 12 VDC -12 VDC 12 VSBDC 	<ul style="list-style-type: none"> 12 VDC -12 VDC 12 VSBDC
Temperature range		
Operating	5°C to 50°C (41°F to 122°F)	5°C to 50°C (41°F to 122°F)

Table 16. Power ratings (continued)

Description	Option one	Option two
	Standby—40°C (104°F)	Standby—40°C (104°F)
Storage Minimum	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

Power cord

This section lists the power-cord plug types for 1500 W/2200 W PSU on your Precision 7960 Tower based on the countries shipped.

i **NOTE:** The 1500 W/2200 W PSUs have C20 cord and require 20 A circuit at 115 V or a 220 V circuit. The power supply units are externally accessible, removal, and lockable.

Table 17. Power-cord plug types











Power-cord style	Plug type	Affected countries
Argentina		Argentina
Australia		<ul style="list-style-type: none"> • Australia • Christmas Island • Cook Islands • Fiji • Kiribati • Nauru • New Zealand • Papua New Guinea • Pitcairn • Tonga • Tuvalu • Uruguay
Brazil		Brazil
China		China
Italy		<ul style="list-style-type: none"> • Chile • Holy See • Italy • Uruguay
Japan—250 V		Japan

Table 17. Power-cord plug types (continued)

Power-cord style	Plug type	Affected countries
North America—125 V		<ul style="list-style-type: none"> • Anguilla • American Samoa • Aruba • Bahamas • Barbados
North America—250 V		<ul style="list-style-type: none"> • Belize • Bermuda • British Virgin Islands • Canada • Cayman Islands • Colombia • Costa Rica • Dominican Republic • Ecuador • El Salvador • Guam • Guatemala • Haiti • Honduras • Jamaica • North Mariana • Marshall Island • Mexico • Nicaragua • Palau • Panama • Philippines • Puerto Rico • Samoa • St. Maarten • Trinidad and Tobago • Turks and Caicos • United States • US Virgin Islands • Venezuela • Vietnam
Switzerland		<ul style="list-style-type: none"> • Liechtenstein • Switzerland
India		India

Power supply connector

The following table lists the Power supply connector specifications of your Precision 7960 Tower.

Table 18. Power supply connector

1100 W/1400 W Gold internal power supply unit	Golden finger design without cable
1500 W/2200 W Platinum internal power supply unit	Golden finger design without cable

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Precision 7960 Tower.

Table 19. GPU—Discrete

Controller	Memory size	Memory type
NVIDIA RTX A6000	48 GB	GDDR6
NVIDIA RTX A5500	24 GB	GDDR6
NVIDIA RTX A4500	20 GB	GDDR6
NVIDIA RTX A4000	16 GB	GDDR6
NVIDIA RTX A2000	12 GB	GDDR6
NVIDIA T1000	8 GB	GDDR6
NVIDIA T400	4 GB	GDDR6
AMD Radeon Pro W6800	16 GB	GDDR6
AMD Radeon Pro W6600	8 GB	GDDR6



Video port resolution

The following table lists the video port resolution for your Precision 7960 Tower.

Table 20. Video port resolution

Graphics card	Video ports	Maximum supported resolution
NVIDIA RTX A6000	Four DP 1.4 ports	7680 x 4320 @ 24 bpp at 120 Hz i NOTE: Requires two DPs 1.4a and DSC
NVIDIA RTX A5500	Four DP 1.4 ports	7680 x 4320 @ 24 bpp at 120 Hz i NOTE: Requires two DPs 1.4a and DSC
NVIDIA RTX A4500	Four DP 1.4 ports	7680 x 4320 @ 24 bpp at 120 Hz i NOTE: Requires two DPs 1.4a and DSC
NVIDIA RTX A4000	Four DP 1.4 ports	7680 x 4320 @ 24 bpp at 120 Hz i NOTE: Requires two DPs 1.4a and DSC
NVIDIA RTX A2000	Four mini-DP 1.4 ports	7680 x 4320 @ 24 bpp at 120 Hz i NOTE: Requires two DPs 1.4a and DSC

Table 20. Video port resolution (continued)

Graphics card	Video ports	Maximum supported resolution
NVIDIA T1000	Four mini-DP 1.4 ports	7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC
NVIDIA T400	Three mini-DP 1.4 ports	7680 x 4320 @ 24 bpp at 120 Hz  NOTE: Requires two DPs 1.4a and DSC
AMD Radeon Pro W6800	Six mini-DP 1.4 ports	7680 x 4320 @60 Hz
AMD Radeon Pro W6600	Four DP 1.4 ports	7680 x 4320 @60 Hz

Hardware security

The following table lists the hardware security of your Precision 7960 Tower.

Table 21. Hardware security


Hardware security
Kensington security-cable slot
Padlock loop
Chassis lock support - Coin locker
Chassis intrusion switch
Optional lockable bezels for externally-facing front and rear storage flexbays
TPM 2.0 Discrete Hardware

Environmental

The following table lists the environmental specifications of your Precision 7960 Tower.

Table 22. Environmental

Feature	Values
Recyclable packaging	Yes
EPEAT 2018 Gold for selected configuration	Yes
BFR/PVC—free	No
Vertical orientation packaging support	Yes
Multi-Pack packaging	No
Energy-Efficient Power Supply	Standard
ENV0424 compliant	Yes

 **NOTE:** Wood-based fiber packaging contains a minimum of 35% recycled content by total weight of wood-based fiber. Packaging that contains without wood-based fiber can be claimed as Not Applicable. The anticipated required criteria for EPEAT 2018.

Regulatory compliance

The following table lists the regulatory compliance of your Precision 7960 Tower.

Table 23. Regulatory compliance


Regulatory compliance
Product Safety, EMC and Environmental Datasheets
Dell Regulatory Compliance Home page
Dell and the Environment

Operating and storage environment

This table lists the operating and storage specifications of your Precision 7960 Tower.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 24. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.

Engineering specifications

Physical system dimensions

The following table provides the physical dimensions of your Precision 7960 Tower.

NOTE: System weight and shipping weight are based on a typical configuration and may vary based on your system configuration. A typical configuration includes integrated graphics, one hard drive, and one optical drive.

Table 25. Physical system dimensions

Feature	Values
Chassis volume	50.5 L
Chassis Weight	<ul style="list-style-type: none"> • Maximum—37.56 kg (82.82 lbs.) • Typical—23.81 kg (52.50 lbs.) • Minimum—21.04 kg (46.39 lbs.)
Chassis dimensions	
Height	<ul style="list-style-type: none"> • 430.70 mm (16.96 in.) • 434.20 mm (17.09 in.) with runner feet
Width	218.00 mm (8.58 in.)
Depth	<ul style="list-style-type: none"> • 538.30 mm (21.19 in.) • 569.15 mm (22.41 in.) with lock structure
Shipping Weight (includes packaging materials)	Typical—27.34 kg (60.28 lbs.)
Packaging dimensions	
Height	743.00 mm (29.25 in.)
Width	362.00 mm (14.25 in.)
Depth	645.00 mm (25.38 in.)

Add-in card dimensions

Slot limitations

The following table lists the system board connector maximum add-in card allowable dimensions of your Precision 7960 Tower.

Table 26. Slot limitations of add-in cards

Feature	Values
Gen5 PCIe x16 slots	2
Voltage	3.30 V/12 V
Height	4.612 in. (117.15 mm)
Length	12.28 in. (312 mm)

Table 26. Slot limitations of add-in cards (continued)

Feature	Values
Maximum wattage	75 W (300 W with additional power cable)
Gen4 PCIe x16 slots	2
Voltage	3.30 V/12 V
Height	4.612 in. (117.15 mm)
Length	12.28 in. (312 mm)
Maximum wattage	75 W (300 W with additional power cable)
Full-height Gen4 PCIe x8 slots	2
Voltage	3.30 V/12 V
Height	4.612 in. (117.15 mm)
Length	12.28 in. (312 mm)
Maximum wattage	25 W
Full-height, half-length Gen4 PCIe x8 slots wired as x4 electrically	2
Voltage	3.30 V/12 V
Height	4.612 in. (117.15 mm)
Length	12.28 in. (312 mm)
Maximum wattage	25 W

NOTE: The above mentioned height is the maximum height that is supported to accommodate the PCIe card in the chassis. However, ensure to check if there is an auxiliary power cable connection on the top edge of the card when determining whether a PCIe card fits in the chassis. Such cable connections require additional room and must be evaluated on an individual basis. Also, note that the cards taller than the PCIe standard height of 4.376 in. (111.15 mm) may require removal of the PCIe card retainer that is mounted inside the left side-cover.

PCIe add-in cards

Serial PCIe add-in card

Table 27. Serial PCIe add-in card

Feature	Values
Bus	<ul style="list-style-type: none"> • PCI Express spec 2.0 • Single-lane (x1)
Controller	SUNIX SUN2212 (16C950 UART compatible)
USB standard	No
IRQ and IO	Assigned by system
Serial Communication	
Interface	RS-232
Number of ports	One port

Table 27. Serial PCIe add-in card (continued)

Feature	Values
Connectors	DB9 Male
Baud rate	50 bps~115.2 Kbps
Protection	<ul style="list-style-type: none"> • +/-15KV IEC1000-4-2 Air Gap Discharge • +/-8KV IEC1000-4-2 Contact Discharge
Printed circuit board connector	DB44 Female
Power	
Power source	PCI Express Bus Power
Output power capacity	No
Over current protection	No
Power consumption	0.782 W @ idle
Operating System	
Supported operating system	<ul style="list-style-type: none"> • Windows 10 • Windows 11
Environment	
Operating temperature	0°C to 60°C (32°F to 140°F)
Operating humidity	5% to 95% RH
Storage temperature	-20°C to 85°C (-4°F to 185°F)
Standards and Certifications	
EMC	CE/FCC/BSMI/VCCI
Green	RoHS

UltraSpeed Duo M.2 PCIe card

The following table lists the UltraSpeed Duo M.2 PCIe card specifications, also known as Zoom 2 card.

Table 28. UltraSpeed Duo M.2 PCIe card (Zoom 2 card) specifications

Feature	Values
Interface	PCIe
Data rates	PCIe Gen 4
Environment	
Operating temperature	0°C to 60°C (32°F to 140°F)
Operating humidity	5% to 95% RH
Storage temperature	-20°C to 70°C (-4°F to 158°F)

UltraSpeed Quad M.2 PCIe card

The following table lists the UltraSpeed Quad M.2 PCIe card specifications, also known as Zoom 4 card.

Table 29. UltraSpeed Quad M.2 PCIe card specifications

Feature	Values
Interface	PCIe

Table 29. UltraSpeed Quad M.2 PCIe card specifications (continued)

Feature	Values
Data rates	PCIe Gen 4
Environment	
Operating temperature	0°C to 60°C (32°F to 140°F)
Operating humidity	5% to 95% RH
Storage temperature	-20°C to 70°C (-4°F to 158°F)

Thunderbolt 4 PCIe add-in card

The following table lists the Thunderbolt 4 PCIe add-in card specifications.


Table 30. Thunderbolt 4 PCIe add-in card

Features	Values
Design	HL PWA with PCIe 4.0 x4 Full height Bracket option
Number of ports	<ul style="list-style-type: none"> • 2x Type-C I/O • 2x DP input • GPIO (requires side-band cable)
Feature	<ul style="list-style-type: none"> • 40 Gb/s (2x 20) with TB4 and USB 4.0 • Auto switch/shift to Legacy TB/USB (support backwards compatibility) • DP1.4a HBR3 Out (DP-MF and DP-alt) two streams • DP Tunnel 32 Gb/s 2 Streams, USB3 Tunnel 10 Gb/s • Hub Support, TB Networking, Universal Cable
Power	<ul style="list-style-type: none"> • Upper Port - 5 V@3 A (TB + Power Delivery Icon) • Lower Port - 5 V@1.5 A (TB Icon Only)
Drivers	<ul style="list-style-type: none"> • Windows 10 • Windows 11
Cables	<ul style="list-style-type: none"> • 1x Sideband cable (system to TBT4 card) • 2x DP cables x24 cm Graphics loopback (DP connector from GFX card to TBT4 card)
Manuals	<ul style="list-style-type: none"> • Product Specification Sheet and User Guide • Online Post Drivers and Docs
Certificates	<ul style="list-style-type: none"> • Intel Thunderbolt Validation • WHQL • USB 4.0 40 Gb/s
Specifications	<ul style="list-style-type: none"> • Dell standard reliability • Behavior • Materials

NOTE: The Thunderbolt 4 PCIe add-in card is supported only in PCH PCIe slot, see the below illustration for the PCH PCIe location on system board.

Slot number	Precision 7960 Tower
Slot 1	CPU
Slot 2	PCH
Slot 3	PCH

Slot number	Precision 7960 Tower
Slot 4	CPU
Slot 5	CPU
Slot 6	CPU
Slot 7	CPU
Slot 8	CPU

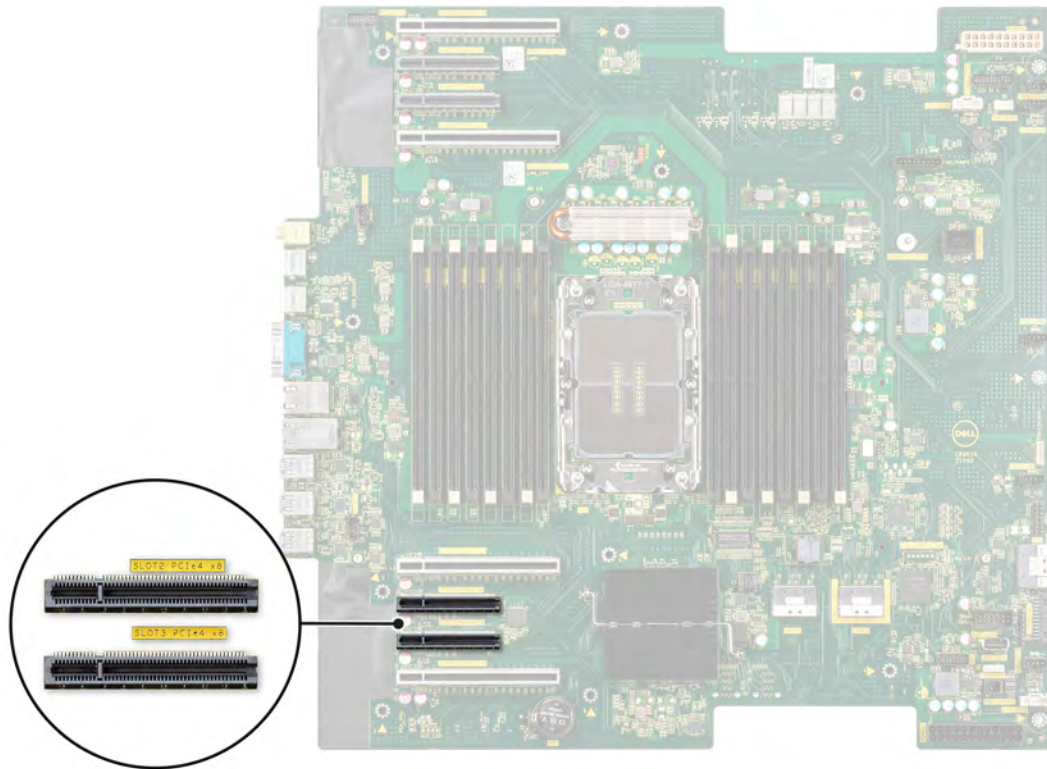

Ethernet

Intel Ethernet Connection i219-LM

The following table lists the i219-LM specifications.

Table 31. Intel Ethernet Connection i219-LM specifications

Feature	Values
External connector type	RJ45
Data rate	10/100/1000 Mbps
Controller Details	
Controller bus architecture	PCI Express base specification revision 1.1
Integrated memory	Yes
Data transfer mode	Yes (Bus-Master DMA)
Power consumption (Full operation per data rate connection speed)	542 mW (Max)

Table 31. Intel Ethernet Connection i219-LM specifications (continued)

Feature	Values
Power consumption (Standby operation)	76 mW (Max)
IEEE standards compliance	802.3
Hardware certifications	N/A
Boot ROM support	EEPROM (Located in SPI)
Network Transfer Mode	
Network transfer rate	10 Mb (full/half-duplex)
10BASE-T (full-duplex) 20 Mbps	100 Mb (full/half-duplex)
100BASE-TX (half-duplex) 100 Mbps	1000 Mb (full-duplex)
Environmental	
Operating temperature range	0°C–85°C (32°F–185°F)
Operating humidity	20% to 80% (non condensing)
Operating system driver Support	<ul style="list-style-type: none"> ● Windows (x64) ● Ubuntu
Manageability	<ul style="list-style-type: none"> ● Wakeup On LAN ● PXE 2.1
Management capabilities alerting	Optional Intel Standard Manageability (must be made at time of purchase).

This term does not connote an actual operating speed of 1 Gb/sec. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

Marvell AQC113CS/AQC113

The following table lists the Marvell AQC113CS/AQC113 Ethernet specifications.

Table 32. Marvell AQC113CS/AQC113 Ethernet specifications

Feature	Values
External connector type	RJ45
Data rate	10 Gbps
LED indicators	<ul style="list-style-type: none"> ● Link - Solid ● Activity - Blinking
LED color	<ul style="list-style-type: none"> ● Yellow - 10 Gbps ● LED off - 100 Mbps or 10 Mbps
Adapter Features	
Bus Type/Bus Width	<ul style="list-style-type: none"> ● PCI Express 3.0 x2 (AQC113CS) ● PCI Express 2.0 x4 (AQC113)
Interrupt levels	INTA, MSI, MSI-X
Hardware certifications	FCC B, UL, CE, VCCI, BSMI, CTICK, KCC, EEE
Controller	Marvel AQC113CS/AQC113
Power Consumption	
Link Speed / Traffic	Typical power
10 Mbps	.5 W

Table 32. Marvell AQC113CS/AQC113 Ethernet specifications (continued)

Feature	Values
100 Mbps	.6 W
1 Gbe	1 W
2.5 Gbe	1.9 W
Environmental	
Operating temperature range	0°C–55°C (32°F–131°F)
Storage temperature range	-40°C–70°C (-40°F–158°F)
Storage humidity	Maximum 90% non-condensing relative humidity at 35°C

i **NOTE:** The iPXE feature is not supported by AQC113CS chipset, Dell recommends you to connect to i219-LM 1G on-board LAN for iPXE or PXE usage.

Wireless module

Qualcomm WCN6856, 2x2, Wi-Fi 6E DBS, Bluetooth 5.3

The following table lists the Intel Qualcomm WCN6856 specifications.

Table 33. Qualcomm WCN6856 specifications

Host interface	<ul style="list-style-type: none"> • Wi-Fi - PCIe • Bluetooth - USB
Network standard	IEEE 802.11a/b/g/n/ac/ax, 160MHz channel use, MU-MIMO
Wi-Fi Alliance certifications	<ul style="list-style-type: none"> • 802.11 a/b/g/n/ac R2/ax R2 • WMM • WMM-PS • WPA3 • WPS2 • PMF • WFD • Miracast • Passpoint R2 • Voice Personal
Operating frequency bands	<ul style="list-style-type: none"> • 2.4 Ghz • 5 Ghz • 6 Ghz
Data rate	<ul style="list-style-type: none"> • 2.4GHz 40M: Up to 691 Mbps • 5 GHz 160M: Up to 2.88 Gbps • 6 GHz 160M: Up to 2.88 Gbps • DBS mode • 2.4 GHz 40M + 5/6 GHz 160M: Up to 3.57 Gbps
Power consumption	Optimized power modes (sleep states) reduce power consumption during periods of inactivity
Authentication	<ul style="list-style-type: none"> • WPA and WPA2 Personal and Enterprise • WPA3 Personal and Enterprise
Authentication protocols	<ul style="list-style-type: none"> • 802.1X EAP-TLS

Table 33. Qualcomm WCN6856 specifications (continued)

	<ul style="list-style-type: none"> • EAP-TTLS/MSCHAPv2 • PEAPv0 -MSCHAPv2 (EAP-SIM, EAP-AKA, EAP-AKA)
Encryption	<ul style="list-style-type: none"> • 64-bit and 128-bit WEP • TKIP • 128-bit AES-CCMP • 256-bit AES-GCMP
Product safety	<ul style="list-style-type: none"> • UL • C-UL • CB (IEC60950-1)
Government compliance	<ul style="list-style-type: none"> • FIPS 140-2 • FISMA
Client utility	Intel PRO/Set wireless software v22 and later
Antenna diversity	Supported
Radio On/Off	Supported
Roaming	Support seamless roaming between access points
Wake on wireless	Supported
Wireless display	Native Miracast support by Windows
Wireless PAN standard	<ul style="list-style-type: none"> • Dual Mode Bluetooth 5.3 • BLE
Bluetooth data rates	Up to 3Mbps
Bluetooth operating frequency bands	2.4 GHz
Bluetooth profiles supported	Support for Microsoft Inbox Bluetooth profiles in Windows
Bluetooth data encryption	128-bit encryption
Bluetooth output power	Power class 1
Operating temperature	0°C to + 50°C (Full performance at shield temperatures up to 80°C)
Storage temperature	-40°C to +70°C
Humidity	Up to 90% RH non-condensing (at temperatures of 25° C to 35° C)

GPU—Discrete

NVIDIA RTX A6000, 48 GB GDDR6

The following table lists the NVIDIA RTX A6000 specifications.

Table 34. NVIDIA RTX A6000 specifications

Feature	Values
GPU frequency	1410 MHz
DirectX 12	12
Shader model	5.17
Open CL	3

Table 34. NVIDIA RTX A6000 specifications (continued)

Open GL	4.6
GPU memory interface	384 bits
PCIe bus	PCIe 4.0 x16
Display support	Four DP 1.2 Certified, 1.3/1.4 Ready
Graphics memory configuration	48 GB, GDDR6
Graphics memory clock speed	8001 MHz
Active fan sink	4-pin embedded fan controller
Slot number	Dual Slot
PCB form factor	Full Height, Full length
PCB layer	
PCB solder mask	
Bracket form factor	Double
Maximum resolution	7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a & DSC)
Power consumption	300 W

NVIDIA RTX A5500, 24 GB GDDR6

The following table lists the NVIDIA RTX A5500 specifications.

Table 35. NVIDIA RTX A5500 specifications

Feature	Values
GPU frequency	1080 MHz
DirectX 12	12
Shader model	6.6
Open CL	3
Open GL	4.6
GPU memory interface	384 bits
PCIe bus	PCIe 4.0 x16
Display support	Four DP 1.2 Certified, 1.3/1.4 Ready
Graphics memory configuration	24 GB, GDDR6
Graphics memory clock speed	8001 MHz
Active fan sink	4-pin embedded fan controller
Slot number	Dual Slot
PCB form factor	Full Height, Full length
PCB layer	NA
PCB solder mask	NA
Bracket form factor	Double
Maximum resolution	7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a & DSC)

Table 35. NVIDIA RTX A5500 specifications (continued)

Power consumption	230 W
-------------------	-------

NVIDIA RTX A4500, 20 GB GDDR6

The following table lists the NVIDIA RTX A4500 specifications.

Table 36. NVIDIA RTX A4500 specifications

Feature	Values
GPU frequency	1065 MHz
DirectX 12	12
Shader model	5.17
Open CL	3
Open GL	4.6
GPU memory interface	320 bits
PCIe bus	PCIe 4.0 x16
Display support	Four DP 1.2 Certified, 1.3/1.4 Ready
Graphics memory configuration	20 GB, GDDR6
Graphics memory clock speed	8001 MHz
Active fan sink	4-pin embedded fan controller
Slot number	Dual Slots
PCB form factor	Full Height, Full length
PCB layer	NA
PCB solder mask	NA
Bracket form factor	Double
Maximum resolution	7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a & DSC)
Power consumption	200 W

NVIDIA RTX A4000, 16 GB GDDR6

The following table lists the NVIDIA RTX A4000 specifications.

Table 37. NVIDIA RTX A4000 specifications

Feature	Values
GPU frequency	735 MHz
DirectX 12	12
Shader model	5.17
Open CL	3
Open GL	4.6
GPU memory interface	256 bits
PCIe bus	PCIe 4.0 x16

Table 37. NVIDIA RTX A4000 specifications (continued)

Display support	Four DP 1.2 Certified, 1.3/1,4 Ready
Graphics memory configuration	16 GB, GDDR6
Graphics memory clock speed	7000 MHz
Active fan sink	4-pin embedded fan controller
Slot number	Single Slot
PCB form factor	Full Height, Full length
PCB layer	NA
PCB solder mask	NA
Bracket form factor	Single
Maximum resolution	7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a & DSC)
Power consumption	140 W

NVIDIA RTX A2000, 12 GB GDDR6

The following table lists the NVIDIA RTX A2000 specifications.

Table 38. NVIDIA RTX A2000 specifications

Feature	Values
GPU frequency	562 MHz
DirectX 12	12
Shader model	5.17
Open CL	3
Open GL	4.6
GPU memory interface	192 bits
PCIe bus	PCIe 4.0 x16
Display support	Four mini-DP 1.2 Certified, 1.3/1,4 Ready
Graphics memory configuration	12 GB, GDDR6
Graphics memory clock speed	6001 MHz
Active fan sink	4-pin embedded fan controller
Slot number	Dual Slots
PCB form factor	Half Height, Half Length
PCB layer	NA
PCB solder mask	NA
Bracket form factor	Double
Maximum resolution	7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a & DSC)
Power consumption	70 W

NVIDIA T1000, 8 GB GDDR6

The following table lists the NVIDIA T1000 specifications.

Table 39. NVIDIA T1000 specifications

Feature	Values
GPU frequency	1065 MHz
DirectX 12	12
Shader model	5.17
Open CL	3
Open GL	4.6
GPU memory interface	128 bits
PCIe bus	PCIe 3.0 x16
Display support	Four mini-DP 1.2 Certified, 1.3/1.4 Ready
Graphics memory configuration	8 GB, GDDR6
Graphics memory clock speed	5001 MHz
Active fan sink	4-pin embedded fan controller
Slot number	Single Slot
PCB form factor	Half Height
PCB layer	NA
PCB solder mask	NA
Bracket form factor	ATX and Low Profile
Maximum resolution	7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a & DSC)
Power consumption	50 W

NVIDIA T400, 4 GB GDDR6

The following table lists the NVIDIA T400 specifications.

Table 40. NVIDIA T400 specifications

Feature	Values
GPU frequency	420 MHz
DirectX 12	12
Shader model	5.17
Open CL	3
Open GL	4.6
GPU memory interface	64 bits
PCIe bus	PCIe 3.0 x16
Display support	Three mini-DP 1.2 Certified, 1.3/1.4 Ready
Graphics memory configuration	4 GB, GDDR6
Graphics memory clock speed	5001 MHz

Table 40. NVIDIA T400 specifications (continued)

Active fan sink	4-pin embedded fan controller
Slot number	Single Slot
PCB form factor	Half Height
PCB layer	NA
PCB solder mask	NA
Bracket form factor	ATX and Low Profile
Maximum resolution	7680 x 4320 x 24 bpp at 120 Hz (Requires two DPs 1.4a & DSC)
Power consumption	30 W

AMD Radeon Pro W6800, 32 GB GDDR6

The following table lists the AMD Radeon Pro W6800 specifications.

Table 41. AMD Radeon Pro W6800 specifications

Feature	Values
GPU frequency	1575 MHz (base clock)
DirectX 12	12.0 Ultimate
Shader model	6.5
Open CL	2.1
Open GL	4.6
GPU memory interface	256 bit
PCIe bus	Gen 4 (x16 lanes)
Display support	x6 mDP 1.4
Graphics memory configuration	32 GB DDR6
Graphics memory clock speed	2000 MHz
Active fan sink	Fan Controller Embedded(4 pin)
Slot number	2 slot
PCB form factor	OSP
PCB layer	14
PCB solder mask	Black
Bracket form factor	Full Height
Maximum resolution	4096 x 2304 @60 Hz
Power consumption	250 W

AMD Radeon Pro W6600, 8 GB GDDR6

The following table lists the AMD Radeon Pro W6600 specifications.

Table 42. AMD Radeon Pro W6600 specifications

Feature	Values
---------	--------

Table 42. AMD Radeon Pro W6600 specifications (continued)

GPU frequency	1526 MHz (base clock)
DirectX 12	12.0 Ultimate
Shader model	6.5
Open CL	2.1
Open GL	4.6
GPU memory interface	128-bit
PCIe bus	Gen 4 (x8 lanes)
Display support	x4 DP 1.4
Graphics memory configuration	8 GB DDR6
Graphics memory clock speed	2000 MHz
Active fan sink	Fan Controller Embedded(4 pin)
Slot number	Single slot
PCB form factor	OSP
PCB layer	8
PCB solder mask	Black
Bracket form factor	Full Height
Maximum resolution	4096 x 2304 @60 Hz
Power consumption	130 W

GPU and PSU matrix


The following table provides the GPU and PSU matrix of your Precision 7960 Tower.

Table 43. GPU and PSU matrix

GFx card	Card length	Weight (kg)	Power connector	I/O connector	Width	PSU
NVIDIA RTX A6000, 48 GB GDDR6	10.50 in.	1.18	8-pin	• 4 x DP 1.2 ports	Dual	1400 W/2200 W
NVIDIA RTX A5500, 24 GB GDDR6	10.50 in.	1.05	8-pin	• 4 x DP 1.2 ports	Dual	1400 W/2200 W
NVIDIA RTX A4500, 20 GB GDDR6	10.50 in.	1.05	8-pin	• 4 x DP 1.2 ports	Dual	1400 W/2200 W
NVIDIA RTX A4000, 16 GB GDDR6	9.50 in.	0.50	6-pin	• 4 x DP 1.2 ports	Single	1400 W/2200 W
NVIDIA RTX A2000, 12 GB GDDR6	6.60 in.	0.306	NA	• 4 x mini-DP 1.2 ports	Dual	1400 W/2200 W
NVIDIA T1000, 8 GB GDDR6	6.13 in.	0.132	NA	• 4 x mini-DP 1.2 ports	Single	1400 W/2200 W
NVIDIA T400, 4 GB GDDR6	6.13 in.	0.123	NA	• 3 x mini-DP 1.2 ports	Single	1400 W/2200 W
AMD Radeon Pro W6800, 16 GB GDDR6	10.50 in.	0.85	6-pin and 8-pin	• 6 x mini-DP 1.2 ports	Dual	1400 W/2200 W

Table 43. GPU and PSU matrix (continued)

GFx card	Card length	Weight (kg)	Power connector	I/O connector	Width	PSU
AMD Radeon Pro W6600, 8 GB GDDR6	9.50 in.	0.595	6-pin	<ul style="list-style-type: none"> 4 x DP 1.4 ports 	Single	1400 W/2200 W

 **NOTE:** The NVIDIA RTX A6000 8-pin power connector requires two 8-pin VGA connectors.

Storage

2.5-inch, 500 GB, 7200 RPM, SATA, HDD

Table 44. 2.5-inch, 500 GB, 7200 RPM, SATA, HDD specifications

Capacity	500 GB
Speed	7200 RPM
Height (approximate)	7.11 mm (0.28 in.)
Width (approximate)	69.85 mm (2.75 in.)
Depth (approximate)	100.58 mm (3.96 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	976,773,168
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> Idle: 0.7 W Active: 3.25 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	350G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

3.5-inch, 1 TB, 7200 RPM, SATA, HDD

Table 45. 3.5-inch, 1 TB, 7200 RPM, SATA, HDD specifications

Capacity	1 TB
Speed	7200 RPM
Height (approximate)	26.10 mm (1.02 in.)
Width (approximate)	147.06 mm (5.79 in.)
Depth (approximate)	101.60 mm (4.00 in.)

Table 45. 3.5-inch, 1 TB, 7200 RPM, SATA, HDD specifications (continued)

Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	1,953,525,168
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 W • Active: 10 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	65G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 512 GB SSD specifications.

Table 46. 512 GB SSD specifications

Capacity	512 GB
Height (approximate)	2.38 mm (0.17 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	1,000,215,216
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 1 TB SSD specifications.

Table 47. 1 TB SSD specifications

Capacity	1 TB
Height (approximate)	2.38 mm (0.17 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	2,000,409,264
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> ● Idle: 5 mW (PS4 - L1.2) ● Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 2 TB SSD specifications.

Table 48. 2 TB SSD specifications

Capacity	2 TB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	4,000,797,360
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> ● Idle: 5 mW (PS4 - L1.2) ● Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C

Table 48. 2 TB SSD specifications (continued)

Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 4 TB SSD specifications.

Table 49. 4 TB SSD specifications

Capacity	4 TB
Height (approximate)	3.73 mm (0.15 in.)
Width (approximate)	22 mm (0.87 in.)
Depth (approximate)	80 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	8,001,573,552
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

2.5-inch, 600 GB, 15000 RPM, SAS, Enterprise HDD

Table 50. 2.5-inch, 600 GB, 15000 RPM, SAS, Enterprise HDD specifications

Capacity	600 GB
Speed	15000 RPM
Height (approximate)	7.11 mm (0.28 in.)
Width (approximate)	69.85 mm (2.75 in.)
Depth (approximate)	100.58 mm (3.96 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps

Table 50. 2.5-inch, 600 GB, 15000 RPM, SAS, Enterprise HDD specifications (continued)

MTBF	550,000 hours
Logical blocks	1,250,284,896
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 0.7 W • Active: 3.25 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	350G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

2.5-inch, 1.2 TB, 10000 RPM, SAS, Enterprise HDD

Table 51. 2.5-inch, 1.2 TB, 10000 RPM, SAS, Enterprise HDD specifications

Capacity	1.2 TB
Speed	10000 RPM
Height (approximate)	7.11 mm (0.28 in.)
Width (approximate)	69.85 mm (2.75 in.)
Depth (approximate)	100.58 mm (3.96 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	2,500,569,792
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 0.7 W • Active: 3.25 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	350G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

2.5-inch, 2.4 TB, 10000 RPM, SAS, Enterprise HDD

Table 52. 2.5-inch, 2.4 TB, 10000 RPM, SAS, Enterprise HDD specifications

Capacity	2.4 TB
----------	--------

Table 52. 2.5-inch, 2.4 TB, 10000 RPM, SAS, Enterprise HDD specifications (continued)

Speed	10000 RPM
Height (approximate)	7.11 mm (0.28 in.)
Width (approximate)	69.85 mm (2.75 in.)
Depth (approximate)	100.58 mm (3.96 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	5,001,139,584
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 0.7 W • Active: 3.25 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	350G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

3.5-inch, 2 TB, 7200 RPM, SATA, HDD

Table 53. 3.5-inch, 2 TB, 7200 RPM, SATA, HDD specifications

Capacity	2 TB
Speed	7200 RPM
Height (approximate)	25.40 mm (1.00 in.)
Width (approximate)	147.06 mm (5.79 in.)
Depth (approximate)	101.60 mm (4.00 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	3,907,029,168
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 W • Active: 10 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	65G @2ms
Environmental non-operating conditions (non-condensing)	

Table 53. 3.5-inch, 2 TB, 7200 RPM, SATA, HDD specifications (continued)

Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

3.5-inch, 4 TB, 7200 RPM, SATA, HDD

Table 54. 3.5-inch, 4 TB, 7200 RPM, SATA, HDD specifications

Capacity	4 TB
Speed	7200 RPM
Height (approximate)	25.40 mm (1.00 in.)
Width (approximate)	147.06 mm (5.79 in.)
Depth (approximate)	101.60 mm (4.00 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	8,001,573,552
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> ● Idle: 5 W ● Active: 10 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	65G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

3.5-inch, 8 TB, 7200 RPM, SATA, HDD

Table 55. 3.5-inch, 8 TB, 7200 RPM, SATA, HDD specifications

Capacity	8 TB
Speed	7200 RPM
Height (approximate)	25.40 mm (1.00 in.)
Width (approximate)	147.06 mm (5.79 in.)
Depth (approximate)	101.60 mm (4.00 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	16,003,147,104
Power source	

Table 55. 3.5-inch, 8 TB, 7200 RPM, SATA, HDD specifications (continued)

Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 W • Active: 10 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	65G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

3.5-inch, 12 TB, 7200 RPM, SATA, HDD

Table 56. 3.5-inch, 12 TB, 7200 RPM, SATA, HDD specifications

Capacity	12 TB
Speed	7200 RPM
Height (approximate)	25.40 mm (1.00 in.)
Width (approximate)	147.06 mm (5.79 in.)
Depth (approximate)	101.60 mm (4.00 in.)
Interface	SATA 3.0
Speed (maximum)	Up to 6 Gbps
MTBF	550,000 hours
Logical blocks	24,004,720,656
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 W • Active: 10 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	65G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

2.5-inch, 1.92 TB, MU, SATA, SSD

Table 57. 2.5-inch, 1.92 TB, MU, SATA, SSD specifications

Capacity	1.92 TB
Speed	15000 RPM
Height (approximate)	7.11 mm (0.28 in.)
Width (approximate)	69.85 mm (2.75 in.)

Table 57. 2.5-inch, 1.92 TB, MU, SATA, SSD specifications (continued)

Depth (approximate)	100.58 mm (3.96 in.)
Interface	SATA
Speed (maximum)	Up to 6 Gbps
MTBF	1,000,000 hours
Logical blocks	1,250,284,896
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 0.7 W • Active: 3.25 W
Environmental operating conditions (non-condensing)	
Temperature range	5°C to 60°C
Relative humidity range	5% to 90%
Op shock	350G @2ms
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 65°C
Relative humidity range	5% to 95%

Media-card reader

The following table lists the media-card reader specifications of your Precision 7960 Tower.

Table 58. Media-card reader (standard offering)

Media supported (Maximum capacity supported will vary by Flash Media Types)	
Media Supported	<ul style="list-style-type: none"> • Secure Digital (SD) • Secure Digital High Capacity (SDHC) • Secure Digital Extended Capacity (SDXC)
Support Specification Versions	Secure Digital (SD) 4.0
Power source	
Max Power Requirements	1.2 A
Supply Voltage Range	3.3 V
Power Consumption	825 mW (S0)
Environmental operating conditions (Non-condensing)	
Operating Temperature Range	0°C to 70°C
Relative Humidity Range	N/A
Environmental non-operating conditions (Non-condensing)	
Operating Temperature Range	N/A
Relative Humidity Range	N/A

Power ratings

The following table lists the power ratings specifications of your Precision 7960 Tower.

Table 59. Power ratings specifications

Description	Option 1	Option 2
Type	1400 W Gold internal power supply unit	2200 W Gold internal power supply unit
Diameter (connector)	Not supported	Not supported
Input voltage	90 Vac - 264 Vac	90 Vac - 264 Vac
Input frequency	47 Hz - 63 Hz	47 Hz - 63 Hz
Input current (maximum)	15 A	16 A
Output current (continuous)	90 Vac~180 Vac (1100 W) <ul style="list-style-type: none"> ● 12 VDC/91.6 A ● -12 VDC/0.5 A ● 12 VSBDC/8 A 180.1 Vac~264 Vac (1400 W) <ul style="list-style-type: none"> ● 12 V/116.7 A ● -12 VDC/0.5 A ● 12 VSBDC/8 A 	90 Vac~114.9 Vac (1200 W) <ul style="list-style-type: none"> ● 12 VDC/98.37 A ● -12 VDC/0.5 A ● 12 VSBDC/8 A 115 Vac~179.9 Vac (1500 W) <ul style="list-style-type: none"> ● 12 V/122.96 A ● -12 VDC/0.5 A ● 12 VSBDC/8 A 180.1 Vac~264 Vac (2200 W) <ul style="list-style-type: none"> ● 12 VDC/180.33 A ● -12 VDC/0.5 A ● 12 VSBDC/8 A
Rated output voltage	<ul style="list-style-type: none"> ● 12 VDC ● -12 VDC ● 12 VSBDC 	<ul style="list-style-type: none"> ● 12 VDC ● -12 VDC ● 12 VSBDC
BTUs/h (based on PSU max wattage)	888	888
Temperature range		
Operating	5°C to 50°C (41°F to 122°F) Standby—40°C (104°F)	5°C to 50°C (41°F to 122°F) Standby—40°C (104°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
Compliance		
Erp Lot3 Tier 2 requirement	Yes	Yes
80Plus compliant	Yes	Yes
Energy Star 8.0 compliant	Yes	Yes
GS mark compliant	Yes	Yes
NCTC Anti Power Surge certification	Yes	Yes
NCTC Anti Lightning Strike certification	Yes	Yes

Thermal dissipation

The following table lists the thermal dissipation of your Precision 7960 Tower.

Table 60. Thermal dissipation

Power supply unit	Heat dissipation	Voltage
1400 W Gold internal power supply unit	220 W	90 ~ 264 Vac
2200 W Gold internal power supply unit	193 W	90 Vac
	219 W	115 Vac
	294 W	80 Vac

CMOS battery

The following table lists the CMOS battery specifications of your Precision 7960 Tower.

Table 61. CMOS battery

Brand	Type	Voltage	Composition	Battery life
MITSUBISHI	CR2032	3.0 V	Lithium metal	Continuous Discharge Under 15 kΩ Load to 2.0 V End-Voltage. 20°C±2°C 940 Hrs. or Longer.910 Hrs.or Longer after 12 mo.

Accessories

The following table lists the supported accessories on your Precision 7960 Tower.

Table 62. Accessories

Accessories
3Dconnexion SpaceMouse Wireless
Dell Premier Multi-Device Wireless Keyboard and Mouse - KM7321W
Dell Slim Soundbar - SB521A
Dell UltraSharp 27 Monitor - U2722D
Dell UltraSharp 32 HDR PremierColor Monitor - UP3221Q
Dell Premier Multi-Device Wireless Keyboard and Mouse - KM7321W

Security

Software security

The following table lists the software security details of your Precision 7960 Tower.

Table 63. Software security

Security options
McAfee Small Business Security 30-day free trial
McAfee Small Business Security 12-month subscription

Table 63. Software security (continued)

Security options
McAfee Small Business Security 36 month subscription
Dell Encryption Personal
Dell Encryption Enterprise
Dell Encryption External Media
Dell Bitlocker Manager
Dell SafeGuard and Response VMW Carbonblack Endpoint Standard
D-Pedigree (Secure Supply Chain Functionality)

Trusted Platform Module

The following table lists the Trusted Platform Module (TPM) of your Precision 7960 Tower.

Table 64. Trusted Platform Module (TPM)

TPM: ST/ST33 HTPH2X32AHD8
SPI interface
TPM 2.0
FIPs 140-2 certificate

Acoustic noise emission information tower

The following table lists the acoustic noise emission information of your Precision 7960 Tower.

Table 65. Acoustic noise emission information tower

Component	Test Configuration
CPU	Intel Xeon W9-3495X
Memory	256 GB x 16
HDD (#, capacity)	10 K SAS 2.4T x 8
ODD	DVD+/-RW, 8X, 9.5T, GU90N, HLDS
Graphics Adapter	NVIDIA RTX A6000

Table 66. Declared Sound Power (LWAd)

Operating Mode	Declared Sound Power(LWAd)
Idle	3.87
HDD Operating	4.22
CPU Stressed (50% loading)	4.38
ODD Operating	4.53

Table 67. A-Weighted Sound Pressure Level (dB)

Declared Sound Pressure (LpA)				
Tabletop System			Floor Standing System	
Operating Mode	Operator Position	Bystander Position	Operator Position	Bystander Position

Table 67. A-Weighted Sound Pressure Level (dB) (continued)

Declared Sound Pressure (LpA)				
Idle	32.7	27.9	25.4	24.1
CPU Stressed (50% loading)	33.8	28.9	27.3	26.4

All tests are conducted according to ISO 7779 and declared according to ISO 9296 except CPU Stressed. This test mode is not specified in ISO 7779, but was measured using the same microphone distances and measurement techniques defined for the other reported operating modes.

Declared Sound Power rounded to nearest tenth of a bel per ISO 9296 section 4.4.2

Chassis enclosure and ventilation requirements

Enclosure ventilation

If your enclosure has doors, they need to be of a type that allows at least 30% airflow through the enclosure (front and back).

Enclosure minimum clearance

Leave a 10.20 cm (4 in.) minimum clearance on all vented sides of the computer to permit the airflow required for proper ventilation.

Recommended enclosure

Do not install your computer in an enclosure that does not allow airflow/dusty environment/temperature over 35°C. Do not put any objects to directly block air-vent. This restricts the airflow and impacts your computer's performance, possibly causing it to overheat.

Open desk minimum clearance

If your computer is installed in a corner, on a desk, or under a desk, leave at least 5.10 cm (2 in.) clearance from the back of the computer to the wall to permit the airflow required for proper ventilation.

System management features

Dell commercial systems come with a number of systems management options that are included by default for In-Band management with our Dell Client Command Suite. In-Band management meaning that the Operating System is functional and the device is connected to a network so that it can be managed. The Dell Client Command Suite of tools can be leveraged individually or with a systems management console like SCCM, LANDESK, KACE, etc.

We also offer Out-of-Band management as an option. Out-of-band management is when the system does not have a functional operating system or is turned off and you still want to be able to manage the system in that state.

Dell Client Command Suite for In-Band systems management

Dell Client Command Suite is a free toolkit available for download, for all Latitude Rugged tablets at dell.com/support, that automates and streamlines systems management tasks, saving time, money, and resources. It consists of the following modules that can be used independently, or with a variety of systems management consoles such as SCCM.

Dell Client Command Suite's integration with VMware Workspace ONE Powered by AirWatch, now allows customers to manage their Dell client hardware from the cloud, using a single Workspace ONE console.

Dell Command | Deploy enables easy operating system (OS) deployment across all major OS deployment methodologies and provides numerous system-specific drivers that have been extracted and reduced to an OS-consumable state.

Dell Command | Configure is a graphical user interface (GUI) admin tool for configuring and deploying hardware settings in a pre-OS or post-OS environment, and it operates seamlessly with SCCM and Airwatch and can be self-integrated into LANDesk and KACE. Simply, this is all about the BIOS. Command | Configure allows you to remotely automate and configure over 150+ BIOS settings for a personalized user experience.

Dell Command | PowerShell Provider can do the same things as Command | Configure, but with a different method. PowerShell is a scripting language that allows customers to create a customized and dynamic configuration process.

Dell Command | Monitor is a Windows Management Instrumentation (WMI) agent that provides IT admins with an extensive inventory of the hardware and health-state data. Admins can also configure hardware remotely by using command line and scripting.

Dell Command | Power Manager (end-user tool) is a GUI-based factory-installed battery management tool that allows end users to choose the battery management methods that meet their personal preferences or work schedule without sacrificing IT's capability to control those settings with Group Policy.

Dell Command | Update (end-user tool) is factory-installed and allows admins to individually manage and automatically present and install Dell updates to the BIOS, drivers, and software. Command | Update eliminates the time-consuming hunting and pecking process of update installation.

Dell Command | Update Catalog provides searchable metadata that allows the management console to retrieve the latest system-specific updates (driver, firmware or BIOS). The updates are then delivered seamlessly to end-users using the customer's systems management infrastructure that is consuming the catalog (like SCCM).

Dell Command | vPro Out of Band console extends hardware management to systems that are offline or have an unreachable OS (Dell exclusive features).

Dell Command | Integration Suite for System Center - This suite integrates all the key components of the Client Command Suite into Microsoft System Center Configuration Manager 2012 and Current Branch versions.

Out of Band Systems Management

Intel Standard Manageability option **must be configured in our factory at the time of purchase, as it is NOT field upgradable.** It offers out-of-band management and DASH compliance (https://registry.dmtf.org/registry/results/field_initiative_name%3A%22DASH%201.0%22).

Dell Optimizer

This section details the Dell Optimizer specifications of your Precision 7960 Tower.

On Precision 7960 Tower with Dell Optimizer, the following features are supported:

- **Express Connect**—Automatically joins the access point with the strongest signal, and directs bandwidth to conferencing applications when in use.
- **Express Sign-in**—The Intel Context Sensing Technology's proximity sensor detects your presence to instantly wake up the computer and login using the IR camera and Windows Hello feature. Windows locks when you walk away.
- **ExpressResponse**—Prioritizes the most important applications. Applications open faster and perform better.
- **AudioOptimization**—The audio feature enhances the audio functionality during your online meetings. The audio feature helps filter the background noise, stabilize volume, and prioritize preferred voice streaming during online meetings.


For more information about configuring and using these features, see [Dell Optimizer User Guide](#).

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 68. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.